
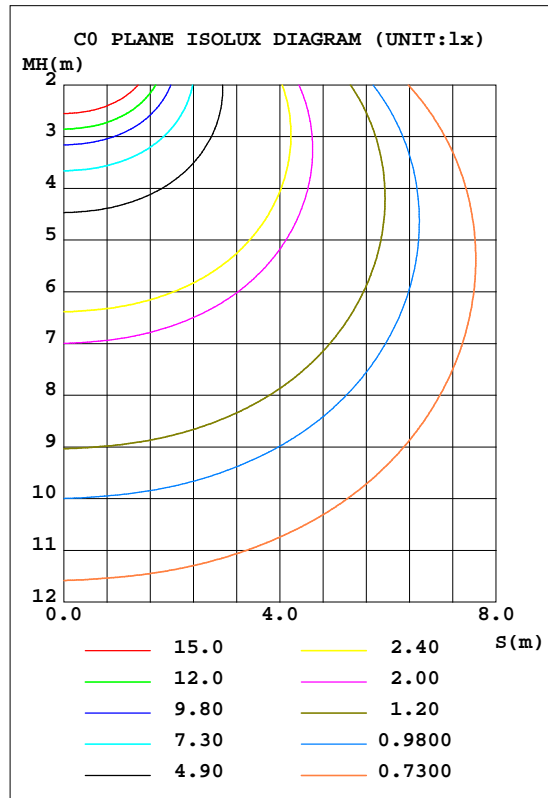


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.5700A P:13.70W PF:1.000 Freq:0Hz Lamp Flux:702.337x1 lm		
NAME: NNR25	TYPE:	WEIGHT:
SPEC.:NNR25-9LW24CSN050CC0100	DIM.: 1000*25	SERIAL No.:
MFR.: COLORS	SUR.:1000*25	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 51.27 lm/W
MODEL	NNR25	I _{max} (cd)	115.0	S/MH(C0/180)	1.75	
NOMINAL POWER(W)	14.4	LOR(%)	100.0	S/MH(C90/270)	1.25	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	702.34	h UP, DN(C0-180)	14.3, 36.0	
NOMINAL FLUX(lm)	702.337	CIE CLASS	SEMI-D.	h UP, DN(C180-360)	13.5, 36.2	
LAMPS INSIDE	1	h up(%)	27.7	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	h down(%)	72.3	CIBSE SHR MAX	1.55	

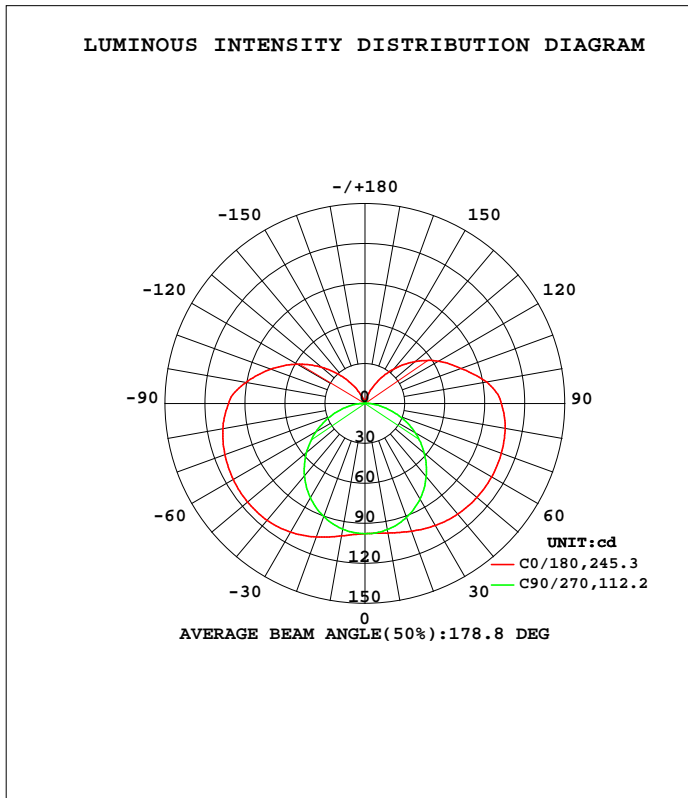

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2019-12-31

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	98.73	96.83	96.11	99.31	100.9	99.14	95.83	96.49	0- 10	9.338	9.338	1.33,1.33
20	101.9	95.96	91.07	100.6	106.6	100.2	90.40	95.25	10- 20	27.75	37.09	5.28,5.28
30	105.7	94.23	82.79	100.5	111.5	99.83	81.92	93.31	20- 30	44.94	82.03	11.7,11.7
40	108.4	91.44	71.58	98.29	114.4	97.29	70.77	90.36	30- 40	59.45	141.5	20.1,20.1
50	109.8	87.39	58.25	93.83	115.0	92.61	57.38	86.40	40- 50	69.92	211.4	30.1,30.1
60	109.9	82.54	43.40	87.85	114.1	86.61	42.51	81.72	50- 60	75.70	287.1	40.9,40.9
70	109.0	77.10	27.37	81.70	111.9	80.30	27.00	76.90	60- 70	76.96	364.1	51.8,51.8
80	106.8	71.66	12.56	75.71	108.3	74.06	12.87	72.52	70- 80	74.40	438.5	62.4,62.4
90	102.4	66.56	2.972	69.19	102.4	67.34	3.148	66.11	80- 90	69.13	507.6	72.3,72.3
100	92.88	58.57	0.8840	57.32	90.88	55.82	0.4619	57.51	90-100	61.77	569.4	81.1,81.1
110	77.09	47.52	0.6218	43.76	75.41	42.97	0.5760	42.25	100-110	49.50	618.9	88.1,88.1
120	63.77	34.68	0.8154	28.66	59.17	29.24	0.7695	32.71	110-120	35.68	654.5	93.2,93.2
130	49.04	25.19	1.030	17.92	42.34	18.48	0.8969	24.44	120-130	24.04	678.6	96.6,96.6
140	34.06	16.17	1.177	8.208	26.36	8.768	1.017	14.57	130-140	14.05	692.6	98.6,98.6
150	19.69	9.710	1.345	3.112	12.19	3.105	1.265	6.309	140-150	6.545	699.2	99.6,99.6
160	7.809	5.293	1.572	2.013	2.744	1.916	1.479	1.875	150-160	2.295	701.5	99.9,99.9
170	1.990	2.643	1.813	1.906	1.553	1.736	1.740	2.332	160-170	0.6823	702.2	100,100
180	1.553	1.809	1.960	1.832	1.573	1.809	1.827	1.859	170-180	0.1825	702.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2019-12-31

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.5700A P:13.70W PF:1.000 Freq:0Hz Lamp Flux:702.337x1 lm		
NAME: NNR25	TYPE:	WEIGHT:
SPEC.: NNR25-9LW24CSN050CC0100	DIM.: 1000*25	SERIAL No.:
MFR.: COLORS	SUR.:1000*25	Shielding Angle:

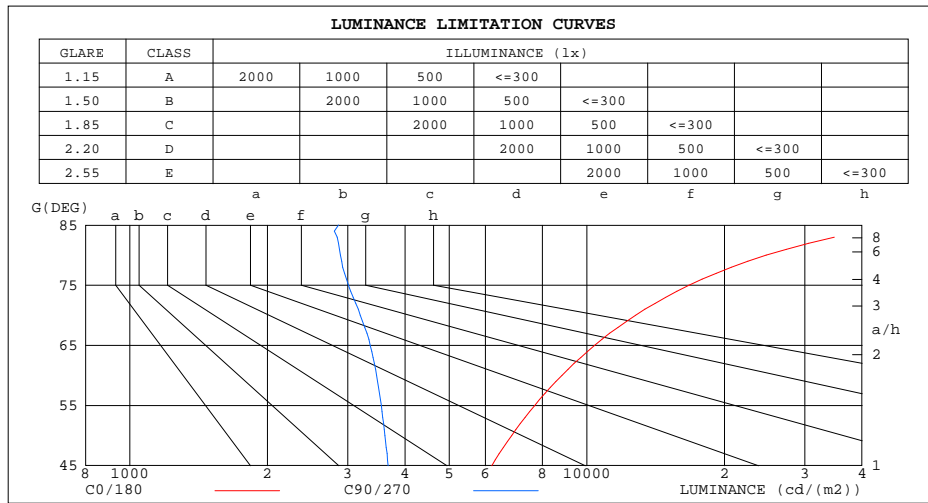

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	48292	2864
80	24661	2888
75	16741	3007
70	12774	3196
65	10397	3359
60	8815	3466
55	7685	3550
50	6846	3619
45	6193	3678


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2019-12-31

G Range: 0 - 180DEG
 G Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.5700A P:13.70W PF:1.000 Freq:0Hz Lamp Flux:702.337x1 lm		
NAME: NNR25	TYPE:	WEIGHT:
SPEC.:NNR25-9LW24CSN050CC0100	DIM.: 1000*25	SERIAL No.:
MFR.: COLORS	SUR.:1000*25	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.12	1.12	1.12	1.07	1.07	1.07	.96	.96	.96	.86	.86	.86	.77	.77	.77	.72
1.0	.92	.86	.80	.86	.81	.77	.77	.73	.69	.68	.65	.62	.60	.58	.55	.51
2.0	.77	.69	.62	.73	.66	.59	.65	.59	.54	.57	.53	.48	.50	.47	.43	.39
3.0	.67	.57	.50	.63	.54	.48	.56	.49	.43	.49	.44	.39	.43	.39	.35	.31
4.0	.58	.48	.41	.55	.46	.39	.49	.41	.36	.43	.37	.32	.38	.33	.29	.26
5.0	.51	.42	.34	.49	.40	.33	.43	.36	.30	.38	.32	.27	.34	.29	.24	.21
6.0	.46	.36	.29	.43	.35	.28	.39	.31	.26	.34	.28	.23	.30	.25	.21	.18
7.0	.41	.32	.26	.39	.31	.24	.35	.28	.22	.31	.25	.20	.27	.22	.18	.16
8.0	.37	.28	.22	.35	.27	.21	.32	.25	.20	.28	.22	.18	.25	.20	.16	.14
9.0	.34	.25	.20	.32	.24	.19	.29	.22	.17	.26	.20	.16	.23	.18	.14	.12
10.0	.31	.23	.18	.30	.22	.17	.27	.20	.16	.24	.18	.14	.21	.17	.13	.11

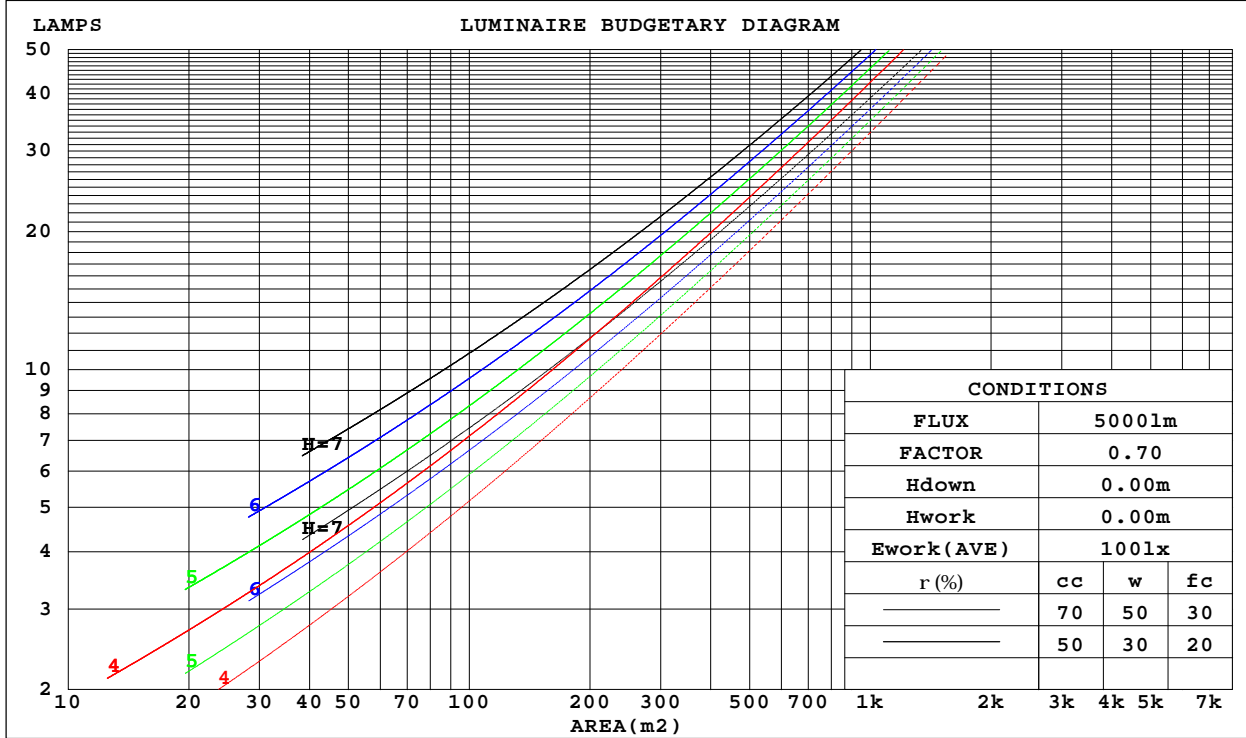

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2019-12-31

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.5700A P:13.70W PF:1.000 Freq:0Hz Lamp Flux:702.337x1 lm		
NAME: NNR25	TYPE:	WEIGHT:
SPEC.:NNR25-9LW24CSN050CC0100	DIM.: 1000*25	SERIAL No.:
MFR.: COLORS	SUR.:1000*25	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.419	.238	.075	.403	.230	.073	.374	.214	.068	.346	.200	.064	.321	.186	.060	
2.0	.352	.193	.059	.338	.186	.057	.311	.173	.054	.287	.161	.050	.264	.149	.047	
3.0	.308	.164	.049	.295	.158	.048	.271	.147	.045	.248	.136	.042	.227	.126	.039	
4.0	.275	.143	.042	.263	.138	.041	.241	.128	.038	.220	.118	.036	.201	.109	.033	
5.0	.248	.126	.037	.237	.122	.035	.217	.113	.033	.198	.105	.031	.180	.096	.029	
6.0	.226	.113	.032	.216	.109	.031	.198	.101	.029	.180	.094	.028	.164	.086	.026	
7.0	.208	.103	.029	.199	.099	.028	.182	.092	.026	.166	.085	.025	.151	.078	.023	
8.0	.192	.094	.026	.184	.090	.026	.168	.084	.024	.153	.078	.022	.139	.071	.021	
9.0	.178	.086	.024	.171	.083	.023	.156	.077	.022	.142	.071	.020	.129	.066	.019	
10.0	.167	.080	.022	.160	.077	.021	.146	.072	.020	.133	.066	.019	.121	.061	.017	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.402	.402	.402	.343	.343	.343	.234	.234	.234	.135	.135	.135	.043	.043	.043	
1.0	.401	.368	.339	.343	.316	.292	.235	.217	.202	.135	.126	.117	.043	.040	.038	
2.0	.395	.346	.305	.338	.298	.264	.232	.206	.184	.134	.120	.108	.043	.039	.035	
3.0	.387	.330	.284	.332	.285	.247	.228	.198	.173	.132	.116	.102	.042	.038	.033	
4.0	.380	.318	.271	.326	.275	.235	.224	.192	.166	.130	.112	.098	.042	.037	.032	
5.0	.372	.309	.262	.319	.267	.228	.220	.187	.161	.127	.110	.095	.041	.036	.031	
6.0	.364	.301	.255	.313	.261	.222	.216	.182	.157	.125	.107	.094	.040	.035	.031	
7.0	.357	.294	.250	.307	.255	.218	.212	.179	.155	.123	.105	.092	.040	.035	.030	
8.0	.350	.289	.247	.302	.251	.215	.209	.176	.153	.121	.104	.091	.039	.034	.030	
9.0	.344	.284	.244	.296	.247	.213	.205	.173	.151	.120	.102	.090	.039	.034	.030	
10.0	.338	.280	.242	.292	.243	.211	.202	.171	.150	.118	.101	.089	.038	.033	.030	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2019-12-31

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.5700A P:13.70W PF:1.000 Freq:0Hz Lamp Flux:702.337x1 lm										
NAME: NNR25					TYPE:			WEIGHT:		
SPEC.:NNR25-9LW24CSN050CC0100					DIM.: 1000*25			SERIAL No.:		
MFR.: COLORS					SUR.:1000*25			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.9	21.2	20.5	21.9	22.6	16.7	18.0	17.3	18.6	19.4
3H	23.2	24.4	23.9	25.1	25.9	18.4	19.6	19.0	20.3	21.1
4H	25.1	26.2	25.7	26.9	27.7	19.1	20.2	19.8	20.9	21.8
6H	27.1	28.2	27.8	28.9	29.8	19.7	20.8	20.4	21.5	22.3
8H	28.3	29.3	29.0	30.1	30.9	19.9	20.9	20.6	21.7	22.5
12H	29.6	30.6	30.3	31.4	32.2	20.0	21.1	20.8	21.8	22.6
4H 2H	20.5	21.6	21.2	22.3	23.1	18.3	19.5	19.0	20.2	21.0
3H	24.0	25.0	24.7	25.7	26.6	20.4	21.4	21.1	22.1	23.0
4H	26.0	26.9	26.7	27.7	28.6	21.4	22.3	22.1	23.0	23.9
6H	28.3	29.1	29.0	29.9	30.8	22.2	23.0	23.0	23.8	24.7
8H	29.6	30.4	30.3	31.1	32.1	22.5	23.3	23.3	24.1	25.1
12H	31.0	31.8	31.8	32.6	33.5	22.8	23.5	23.6	24.3	25.3
8H 4H	26.4	27.1	27.1	27.9	28.9	22.9	23.7	23.7	24.5	25.4
6H	28.9	29.6	29.7	30.4	31.4	24.3	24.9	25.1	25.8	26.7
8H	30.4	31.0	31.2	31.9	32.8	24.9	25.5	25.7	26.3	27.3
12H	32.2	32.7	33.0	33.5	34.5	25.4	26.0	26.3	26.8	27.8
12H 4H	26.4	27.1	27.2	27.9	28.9	23.5	24.2	24.2	25.0	25.9
6H	29.1	29.7	29.9	30.5	31.5	25.1	25.7	25.9	26.5	27.5
8H	30.7	31.2	31.5	32.0	33.1	26.0	26.5	26.8	27.3	28.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.4				

CIE Pub.117, 702.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.2)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2019-12-31

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.5700A P:13.70W PF:1.000 Freq:0Hz Lamp Flux:702.337x1 lm		
NAME: NNR25	TYPE:	WEIGHT:
SPEC.:NNR25-9LW24CSN050CC0100	DIM.: 1000*25	SERIAL No.:
MFR.: COLORS	SUR.:1000*25	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	42	30	22	41	29	22	39	28	21	14
0.80	51	37	29	49	37	29	46	35	27	19
1.00	59	45	36	56	43	35	52	43	34	24
1.25	65	52	42	63	50	41	58	47	39	29
1.50	71	57	48	68	55	47	62	51	44	32
2.00	78	66	57	75	63	55	68	59	51	38
2.50	83	72	63	79	69	60	71	63	56	41
3.00	87	76	68	83	73	66	75	67	61	45
4.00	92	83	75	87	79	72	79	72	67	49
5.00	95	87	81	90	83	77	81	76	71	52
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2019-12-31

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.5700A P:13.70W PF:1.000 Freq:0Hz Lamp Flux:702.337x1 lm		
NAME: NNR25	TYPE:	WEIGHT:
SPEC.:NNR25-9LW24CSN050CC0100	DIM.: 1000*25	SERIAL No.:
MFR.: COLORS	SUR.:1000*25	Shielding Angle:

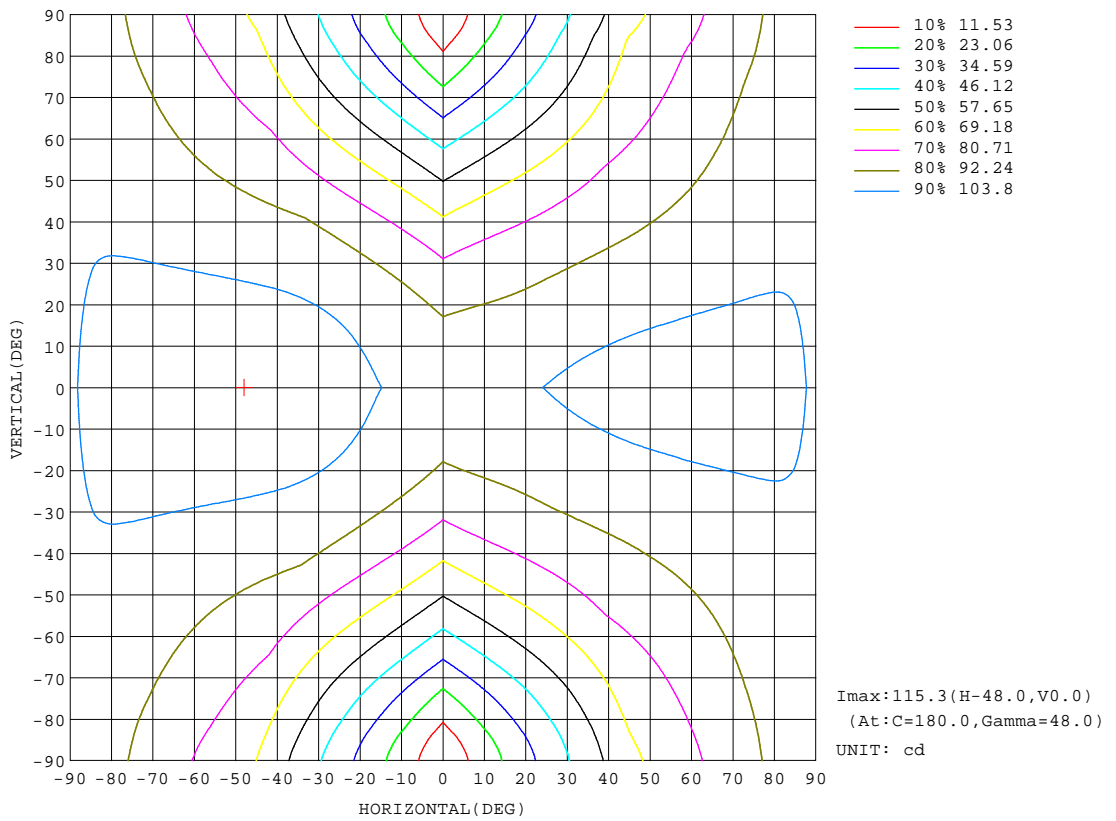


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2019-12-31

Page Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.5700A P:13.70W PF:1.000 Freq:0Hz Lamp Flux:702.337x1 lm		
NAME: NNR25	TYPE:	WEIGHT:
SPEC.:NNR25-9LW24CSN050CC0100	DIM.: 1000*25	SERIAL No.:
MFR.: COLORS	SUR.:1000*25	Shielding Angle:

Flux out:507.6 lm

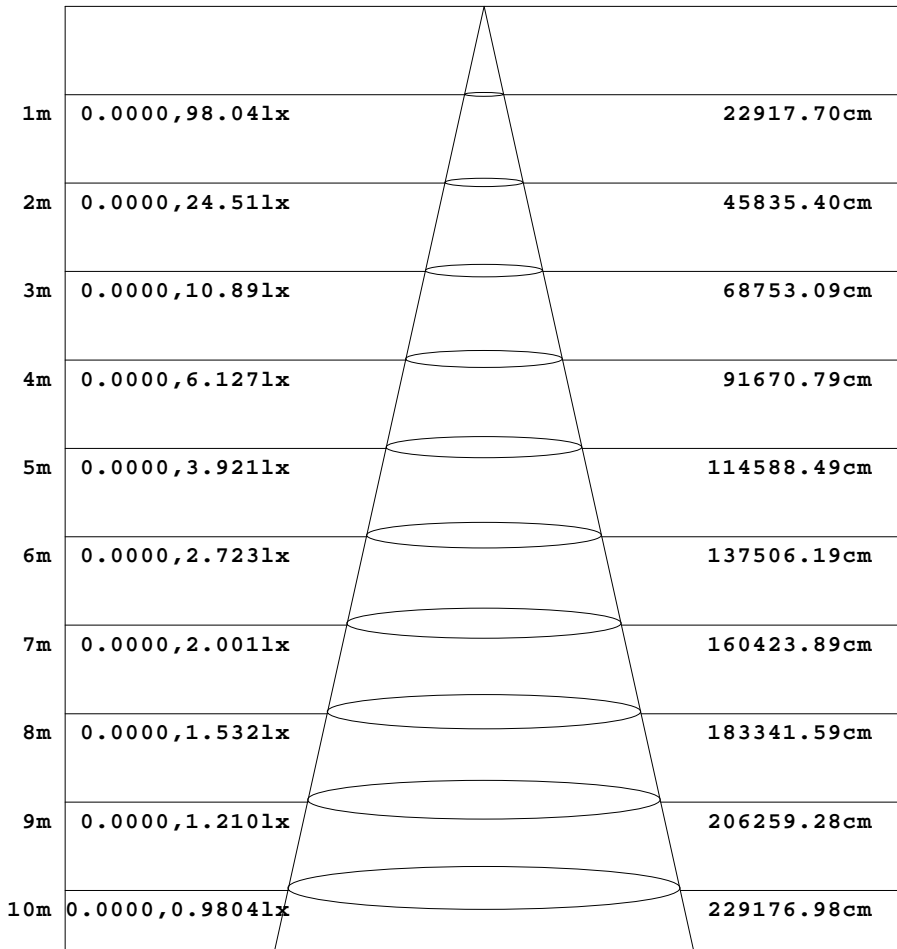

Height Eavg, Emax Angle:179.00deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2019-12-31

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:24.00V I:0.5700A P:13.70W PF:1.000 Freq:0Hz Lamp Flux:702.337x1 lm		
NAME: NNR25	TYPE:	WEIGHT:
SPEC.:NNR25-9LW24CSN050CC0100	DIM.: 1000*25	SERIAL No.:
MFR.: COLORS	SUR.:1000*25	Shielding Angle:

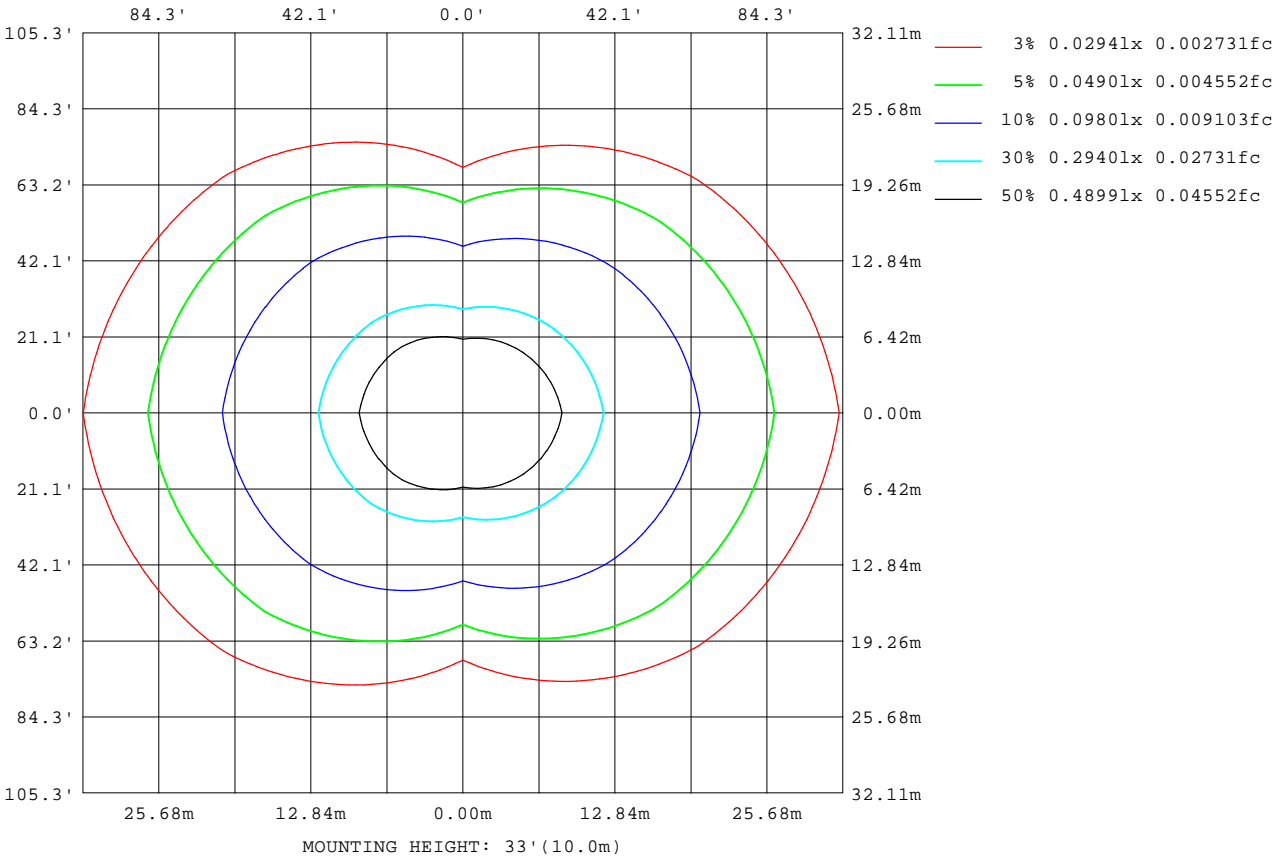

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2019-12-31

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

Planar Illuminance Curve

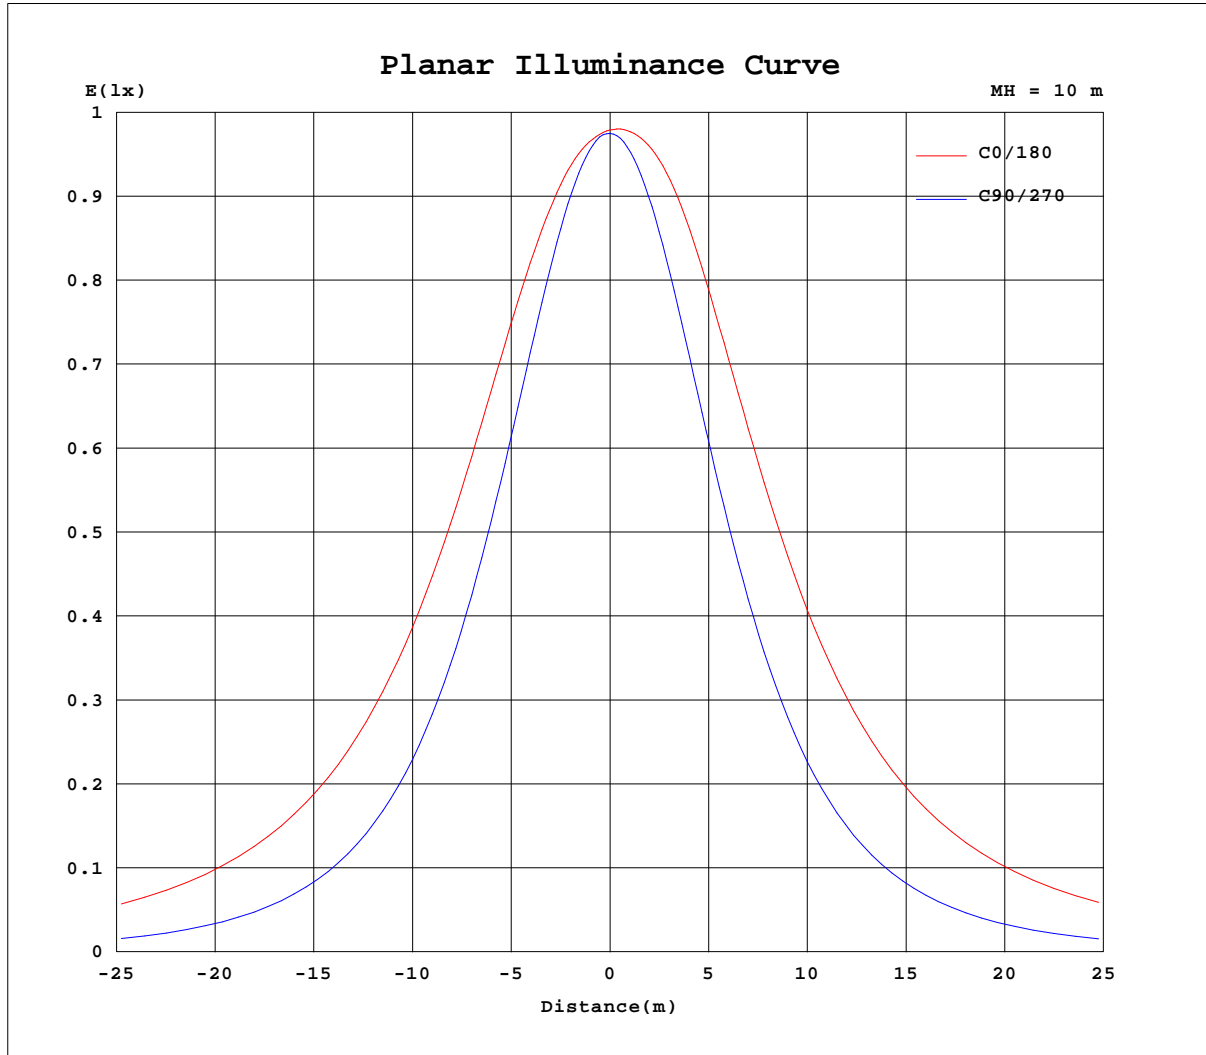

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2019-12-31

Page Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.5700A P:13.70W PF:1.000 Freq:0Hz Lamp Flux:702.337x1 lm		
NAME: NNR25	TYPE:	WEIGHT:
SPEC.:NNR25-9LW24CSN050CC0100	DIM.: 1000*25	SERIAL No.:
MFR.: COLORS	SUR.:1000*25	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	45	90	135	180	225	270	315											
0	97.7	97.7	97.7	97.7	97.7	97.7	97.7	97.7											
5	97.7	97.2	97.4	98.5	98.7	98.4	97.2	97.0											
10	98.7	96.8	96.1	99.3	101	99.1	95.8	96.5											
15	100	96.5	94.0	100	104	99.8	93.6	95.9											
20	102	96.0	91.1	101	107	100	90.4	95.2											
25	104	95.2	87.3	101	109	100	86.5	94.4											
30	106	94.2	82.8	100	112	99.8	81.9	93.3											
35	107	93.0	77.5	99.7	113	98.8	76.7	92.0											
40	108	91.4	71.6	98.3	114	97.3	70.8	90.4											
45	109	89.6	65.1	96.3	115	95.2	64.3	88.5											
50	110	87.4	58.2	93.8	115	92.6	57.4	86.4											
55	110	85.0	51.0	91.0	115	89.7	50.1	84.1											
60	110	82.5	43.4	87.9	114	86.6	42.5	81.7											
65	110	79.9	35.5	84.8	113	83.4	34.7	79.3											
70	109	77.1	27.4	81.7	112	80.3	27.0	76.9											
75	108	74.3	19.5	78.7	110	77.2	19.6	74.7											
80	107	71.7	12.6	75.7	108	74.1	12.9	72.5											
85	105	69.1	6.25	72.6	106	70.8	6.79	70.3											
90	102	66.6	2.97	69.2	102	67.3	3.15	66.1											
95	99.0	63.9	2.71	64.2	98.1	62.3	2.11	63.5											
100	92.9	58.6	0.88	57.3	90.9	55.8	0.46	57.5											
105	84.7	53.0	0.62	50.4	83.3	49.4	0.50	52.3											
110	77.1	47.5	0.62	43.8	75.4	43.0	0.58	42.2											
115	70.3	40.7	0.69	36.6	67.4	35.7	0.67	30.3											
120	63.8	34.7	0.82	28.7	59.2	29.2	0.77	32.7											
125	56.5	29.7	0.96	23.0	50.7	23.8	0.82	27.3											
130	49.0	25.2	1.03	17.9	42.3	18.5	0.90	24.4											
135	41.6	20.3	1.13	12.7	34.2	13.4	0.96	19.3											
140	34.1	16.2	1.18	8.21	26.4	8.77	1.02	14.6											
145	26.8	12.7	1.25	5.19	19.0	5.37	1.10	10.1											
150	19.7	9.71	1.34	3.11	12.2	3.10	1.26	6.31											
155	13.2	7.28	1.45	2.19	6.20	2.08	1.37	3.82											
160	7.81	5.29	1.57	2.01	2.74	1.92	1.48	1.87											
165	3.78	3.77	1.67	1.91	1.75	1.78	1.62	1.72											
170	1.99	2.64	1.81	1.91	1.55	1.74	1.74	2.33											
175	1.59	2.01	1.89	1.89	1.53	1.74	1.83	2.78											
180	1.55	1.81	1.96	1.83	1.57	1.81	1.83	1.86											

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2019-12-31

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks: