
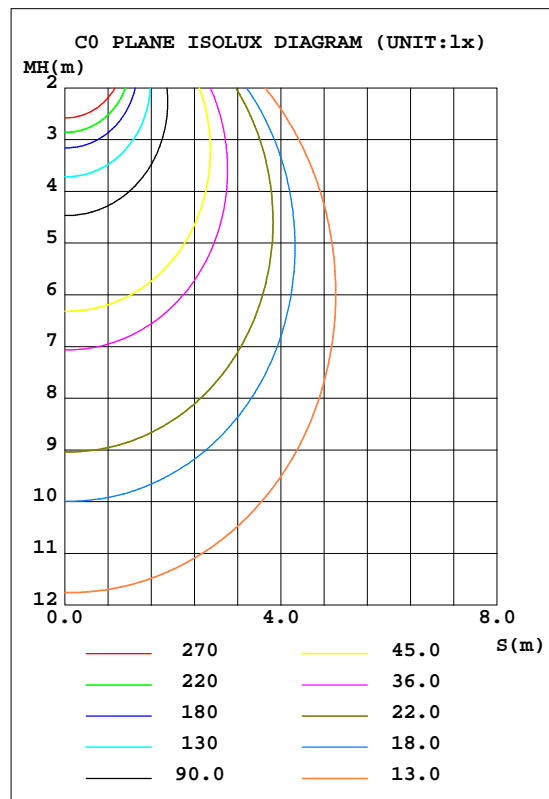


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.7V I:0.1808A P:39.18W PF:0.9823 Freq:49.99Hz Lamp Flux:4114.65x1 lm		
NAME: T-LINE 2"Diffuser	TYPE:	WEIGHT:
SPEC.:TL-LR5392FDFWS1200-T40NW8B-DC	DIM.: 4'x2"x3-3/5"	SERIAL No.:
MFR.: COLORS	SUR.:4'x2"	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 105.01 lm/W			
MODEL	TL-LR5392FDFWS1200	I <sub>max</sub> (cd)	1797	S/MH(C0/180)	1.08
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.17
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	4114.6	h UP, DN(C0-180)	0.6,49.8
NOMINAL FLUX(lm)	4114.65	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.6,49.0
LAMPS INSIDE	1	h up(%)	1.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	h down(%)	98.8	CIBSE SHR MAX	1.25

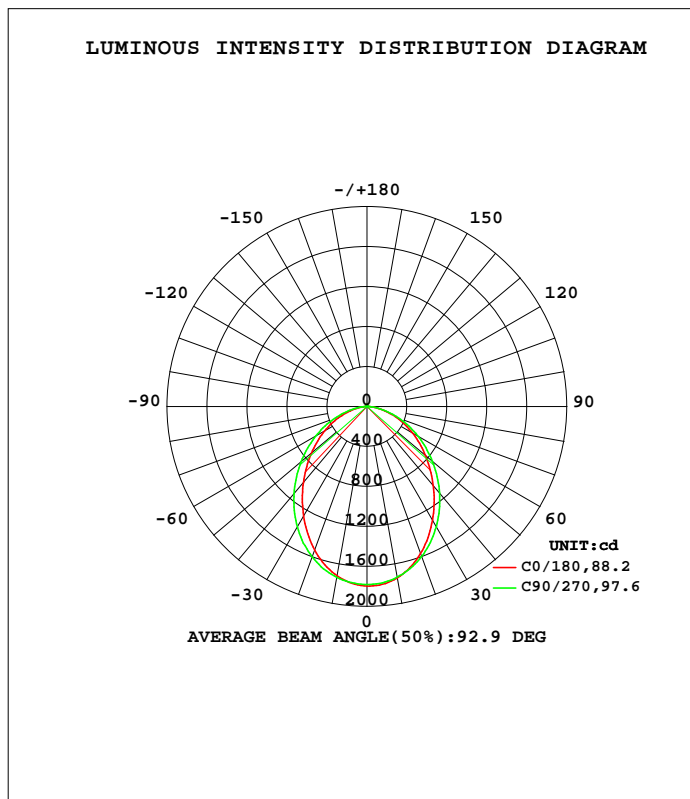

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-08

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1742	1744	1734	1717	1722	1722	1736	1731	0- 10	167.9	167.9	4.08,4.08
20	1566	1594	1599	1554	1530	1556	1602	1581	10- 20	468.0	635.9	15.5,15.5
30	1313	1363	1389	1318	1269	1314	1394	1349	20- 30	672.6	1308	31.8,31.8
40	1033	1092	1131	1047	989.6	1041	1137	1079	30- 40	753.5	2062	50.1,50.1
50	764.9	816.8	855.7	777.1	726.7	771.1	861.3	806.5	40- 50	718.8	2781	67.6,67.6
60	523.2	561.4	586.5	526.6	489.2	520.6	591.7	552.3	50- 60	597.8	3379	82.1,82.1
70	305.2	325.9	337.2	296.2	272.4	293.4	339.0	320.4	60- 70	421.0	3800	92.3,92.3
80	113.8	123.4	119.6	100.2	89.82	97.88	122.5	119.2	70- 80	218.5	4018	97.7,97.7
90	1.792	7.067	2.813	1.750	0.5836	0.6812	0.7367	1.140	80- 90	47.49	4066	98.8,98.8
100	2.087	2.445	2.827	2.513	1.972	1.922	2.026	1.829	90-100	1.909	4068	98.9,98.9
110	4.096	4.343	5.369	4.159	3.885	3.696	4.854	3.766	100-110	3.352	4071	98.9,98.9
120	6.423	6.703	8.823	6.189	5.972	5.715	7.608	6.050	110-120	5.424	4076	99.1,99.1
130	9.024	9.040	11.33	8.552	8.338	8.111	10.21	8.097	120-130	7.054	4083	99.2,99.2
140	12.01	11.39	13.31	11.59	10.95	11.16	12.53	10.55	130-140	8.007	4091	99.4,99.4
150	15.17	13.47	15.75	14.72	13.65	14.93	15.36	13.06	140-150	8.154	4100	99.6,99.6
160	18.99	16.14	19.10	18.53	16.80	18.80	18.85	16.19	150-160	7.458	4107	99.8,99.8
170	22.10	20.35	22.10	21.76	20.06	22.07	21.95	20.67	160-170	5.520	4113	99.9,99.9
180	22.94	24.73	24.31	24.86	22.99	24.66	24.37	24.81	170-180	2.142	4115	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-08

g Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:220.7V I:0.1808A P:39.18W PF:0.9823 Freq:49.99Hz Lamp Flux:4114.65x1 lm		
NAME: T-LINE 2"Diffuser	TYPE:	WEIGHT:
SPEC.:TL-LR5392FDFWS1200-T40NW8B-DC	DIM.: 4'x2"x3-3/5"	SERIAL No.:
MFR.: COLORS	SUR.:4'x2"	Shielding Angle:

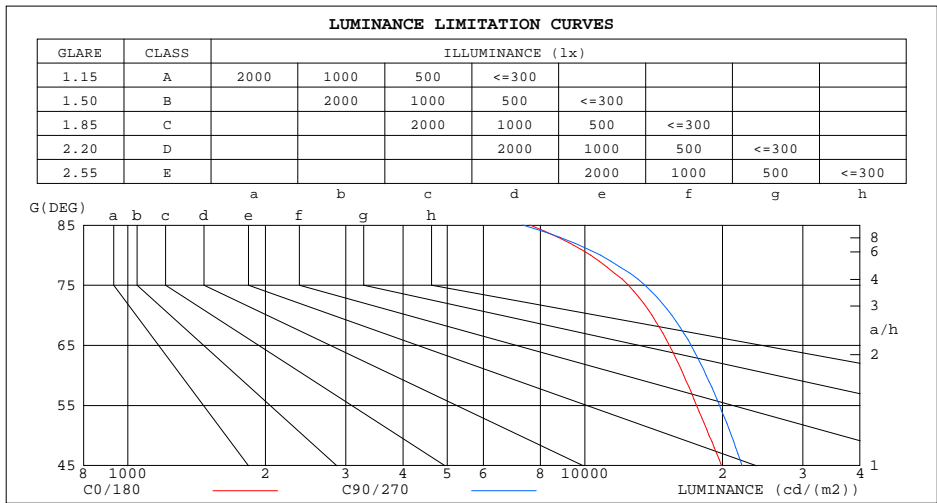


C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-08

G Range: 0 - 180DEG  
 G Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.7V I:0.1808A P:39.18W PF:0.9823 Freq:49.99Hz Lamp Flux:4114.65x1 lm		
NAME: T-LINE 2"Diffuser	TYPE:	WEIGHT:
SPEC.:TL-LR5392FDFWS1200-T40NW8B-DC	DIM.: 4'x2"x3-3/5"	SERIAL No.:
MFR.: COLORS	SUR.:4'x2"	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.05	1.01	.97	1.03	.99	.96	.98	.95	.92	.94	.92	.89	.90	.88	.87	.84
2.0	.92	.86	.81	.90	.85	.80	.87	.82	.78	.83	.79	.76	.80	.77	.74	.72
3.0	.82	.74	.68	.80	.73	.67	.77	.71	.66	.74	.69	.65	.71	.67	.63	.61
4.0	.73	.65	.58	.72	.64	.58	.69	.62	.57	.67	.61	.56	.64	.59	.55	.53
5.0	.66	.57	.51	.64	.56	.50	.62	.55	.50	.60	.54	.49	.58	.53	.48	.46
6.0	.59	.51	.45	.58	.50	.44	.56	.49	.44	.55	.48	.43	.53	.47	.43	.41
7.0	.54	.46	.40	.53	.45	.40	.52	.44	.39	.50	.44	.39	.49	.43	.38	.37
8.0	.50	.41	.36	.49	.41	.36	.47	.40	.35	.46	.40	.35	.45	.39	.35	.33
9.0	.46	.38	.32	.45	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.30
10.0	.42	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27

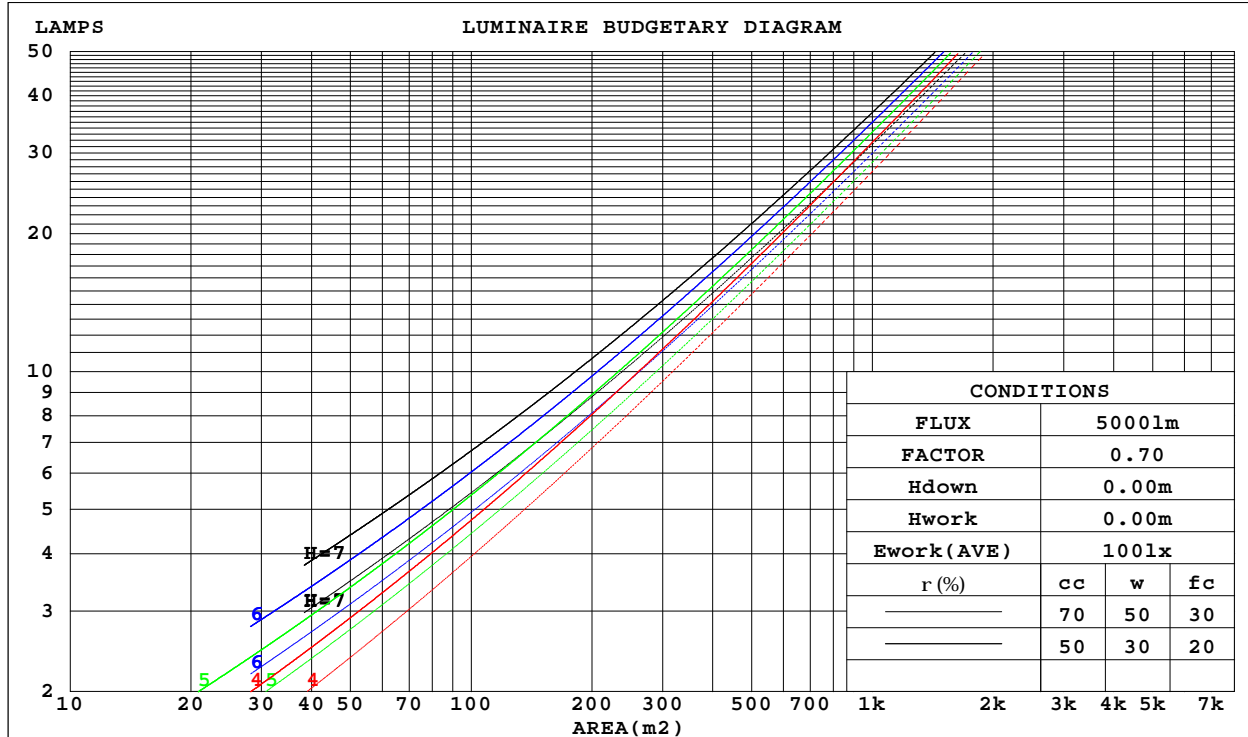

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-08

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:220.7V I:0.1808A P:39.18W PF:0.9823 Freq:49.99Hz Lamp Flux:4114.65x1 lm		
NAME: T-LINE 2"Diffuser	TYPE:	WEIGHT:
SPEC.:TL-LR5392FDFWS1200-T40NW8B-DC	DIM.: 4'x2"x3-3/5"	SERIAL No.:
MFR.: COLORS	SUR.:4'x2"	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.284	.162	.051	.277	.158	.050	.263	.151	.048	.250	.144	.046	.239	.138	.045	
2.0	.271	.148	.046	.264	.146	.045	.252	.140	.044	.241	.135	.042	.231	.130	.041	
3.0	.253	.135	.040	.247	.132	.040	.236	.128	.039	.226	.124	.038	.217	.120	.037	
4.0	.235	.122	.036	.230	.120	.036	.220	.117	.035	.211	.114	.034	.203	.110	.034	
5.0	.218	.111	.032	.214	.110	.032	.205	.107	.031	.198	.104	.031	.190	.102	.031	
6.0	.203	.102	.029	.199	.101	.029	.192	.098	.029	.185	.096	.028	.178	.094	.028	
7.0	.190	.094	.027	.187	.093	.026	.180	.091	.026	.173	.089	.026	.167	.087	.026	
8.0	.178	.087	.024	.175	.086	.024	.169	.084	.024	.163	.083	.024	.158	.081	.024	
9.0	.167	.081	.023	.165	.080	.023	.159	.079	.022	.154	.077	.022	.149	.076	.022	
10.0	.158	.076	.021	.155	.075	.021	.150	.074	.021	.146	.072	.021	.141	.071	.020	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.200	.200	.200	.171	.171	.171	.116	.116	.116	.067	.067	.067	.021	.021	.021	
1.0	.188	.166	.146	.161	.142	.125	.110	.098	.087	.063	.057	.050	.020	.018	.016	
2.0	.179	.141	.110	.153	.122	.095	.105	.084	.066	.060	.049	.039	.019	.016	.013	
3.0	.170	.123	.086	.146	.106	.075	.100	.074	.052	.058	.043	.031	.019	.014	.010	
4.0	.163	.110	.070	.140	.095	.061	.096	.066	.043	.056	.039	.025	.018	.013	.008	
5.0	.155	.099	.058	.133	.086	.051	.092	.060	.036	.053	.035	.021	.017	.012	.007	
6.0	.148	.091	.050	.127	.079	.044	.088	.055	.031	.051	.032	.018	.016	.011	.006	
7.0	.142	.084	.044	.122	.073	.038	.084	.051	.027	.049	.030	.016	.016	.010	.005	
8.0	.135	.078	.039	.116	.068	.034	.081	.048	.024	.047	.028	.014	.015	.009	.005	
9.0	.129	.073	.035	.111	.064	.031	.077	.045	.022	.045	.026	.013	.015	.009	.004	
10.0	.124	.069	.032	.107	.060	.028	.074	.042	.020	.043	.025	.012	.014	.008	.004	

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.7V I:0.1808A P:39.18W PF:0.9823 Freq:49.99Hz Lamp Flux:4114.65x1 lm										
NAME: T-LINE 2"Diffuser					TYPE:			WEIGHT:		
SPEC.:TL-LR5392FDFWS1200-T40NW8B-DC					DIM.: 4'x2"x3-3/5"			SERIAL No.:		
MFR.: COLORS					SUR.:4'x2"			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.6	19.1	17.9	19.3	19.5	18.1	19.5	18.4	19.7	19.9
3H	18.9	20.2	19.2	20.4	20.7	19.4	20.7	19.7	20.9	21.2
4H	19.3	20.6	19.7	20.9	21.1	19.8	21.1	20.1	21.3	21.6
6H	19.6	20.8	20.0	21.1	21.4	20.1	21.3	20.4	21.6	21.9
8H	19.7	20.8	20.1	21.1	21.4	20.2	21.3	20.5	21.6	21.9
12H	19.7	20.8	20.1	21.1	21.5	20.2	21.3	20.5	21.6	21.9
4H 2H	18.2	19.5	18.5	19.7	20.0	18.6	19.8	18.9	20.1	20.4
3H	19.6	20.7	20.0	21.0	21.4	20.0	21.1	20.4	21.4	21.7
4H	20.2	21.2	20.6	21.5	21.9	20.6	21.6	21.0	21.9	22.3
6H	20.6	21.5	21.0	21.9	22.2	21.0	21.9	21.4	22.2	22.6
8H	20.7	21.5	21.2	21.9	22.3	21.1	21.9	21.5	22.3	22.7
12H	20.8	21.5	21.2	21.9	22.4	21.1	21.9	21.6	22.3	22.7
8H 4H	20.4	21.3	20.9	21.6	22.1	20.8	21.6	21.2	22.0	22.4
6H	21.0	21.6	21.4	22.1	22.5	21.3	22.0	21.8	22.4	22.8
8H	21.1	21.7	21.6	22.2	22.7	21.5	22.1	21.9	22.5	23.0
12H	21.2	21.8	21.7	22.2	22.7	21.5	22.1	22.0	22.5	23.0
12H 4H	20.4	21.2	20.9	21.6	22.0	20.8	21.5	21.2	21.9	22.4
6H	21.0	21.6	21.5	22.0	22.5	21.3	21.9	21.8	22.4	22.8
8H	21.2	21.7	21.7	22.2	22.7	21.5	22.0	22.0	22.5	23.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.3					+ 0.1 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.3 / - 0.3				

CIE Pub.117, 4115 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.9)

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-08

g Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.7V I:0.1808A P:39.18W PF:0.9823 Freq:49.99Hz Lamp Flux:4114.65x1 lm		
NAME: T-LINE 2"Diffuser	TYPE:	WEIGHT:
SPEC.:TL-LR5392FDFWS1200-T40NW8B-DC	DIM.: 4'x2"x3-3/5"	SERIAL No.:
MFR.: COLORS	SUR.:4'x2"	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	61	50	43	60	49	43	59	49	43	37
0.80	71	60	53	70	59	53	68	58	52	46
1.00	79	68	62	78	68	61	75	69	61	54
1.25	86	76	69	84	75	69	81	74	68	61
1.50	90	81	75	89	80	74	86	78	73	66
2.00	97	89	83	95	88	82	91	85	80	73
2.50	100	93	88	98	92	87	94	89	85	76
3.00	103	97	92	101	96	91	97	92	89	80
4.00	107	102	98	105	100	96	100	97	93	84
5.00	109	105	101	107	103	100	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:220.7V I:0.1808A P:39.18W PF:0.9823 Freq:49.99Hz Lamp Flux:4114.65x1 lm		
NAME: T-LINE 2"Diffuser	TYPE:	WEIGHT:
SPEC.:TL-LR5392FDFWS1200-T40NW8B-DC	DIM.: 4'x2"x3-3/5"	SERIAL No.:
MFR.: COLORS	SUR.:4'x2"	Shielding Angle:

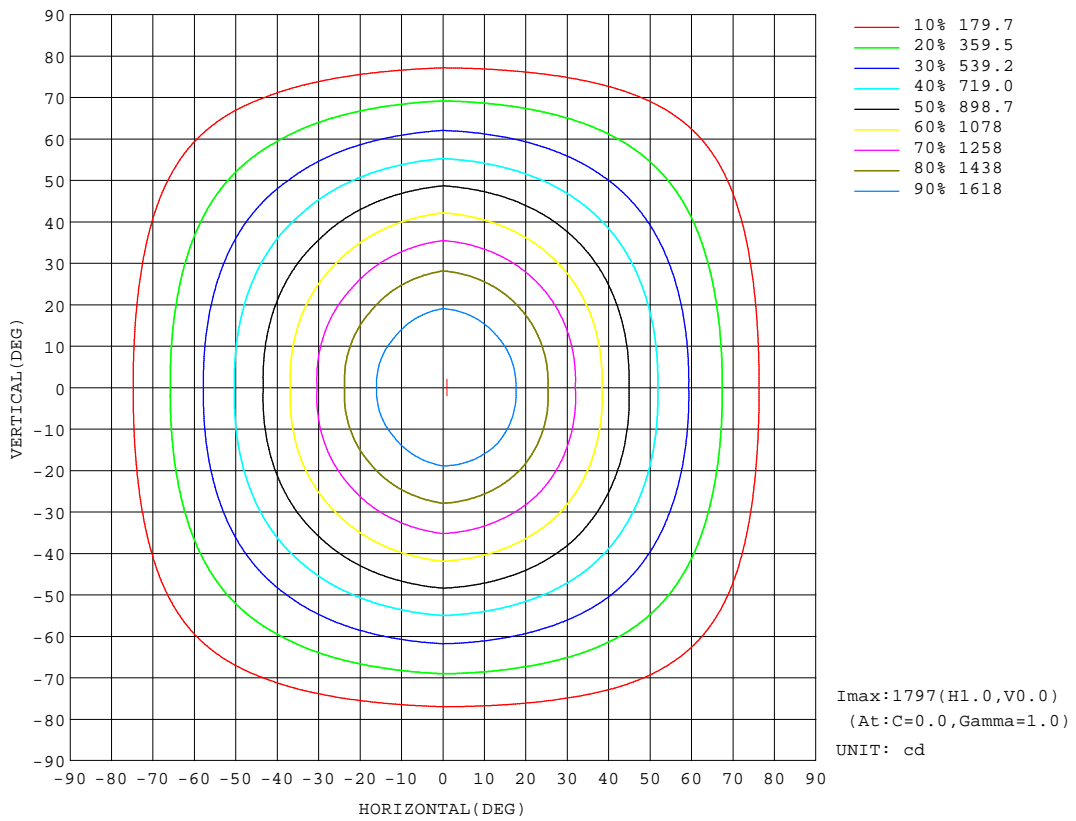

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-08


Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:



AAI Figure

Test:U:220.7V I:0.1808A P:39.18W PF:0.9823 Freq:49.99Hz Lamp Flux:4114.65x1 lm		
NAME: T-LINE 2"Diffuser	TYPE:	WEIGHT:
SPEC.:TL-LR5392FDFWS1200-T40NW8B-DC	DIM.: 4'x2"x3-3/5"	SERIAL No.:
MFR.: COLORS	SUR.:4'x2"	Shielding Angle:

Flux out:2574 lm

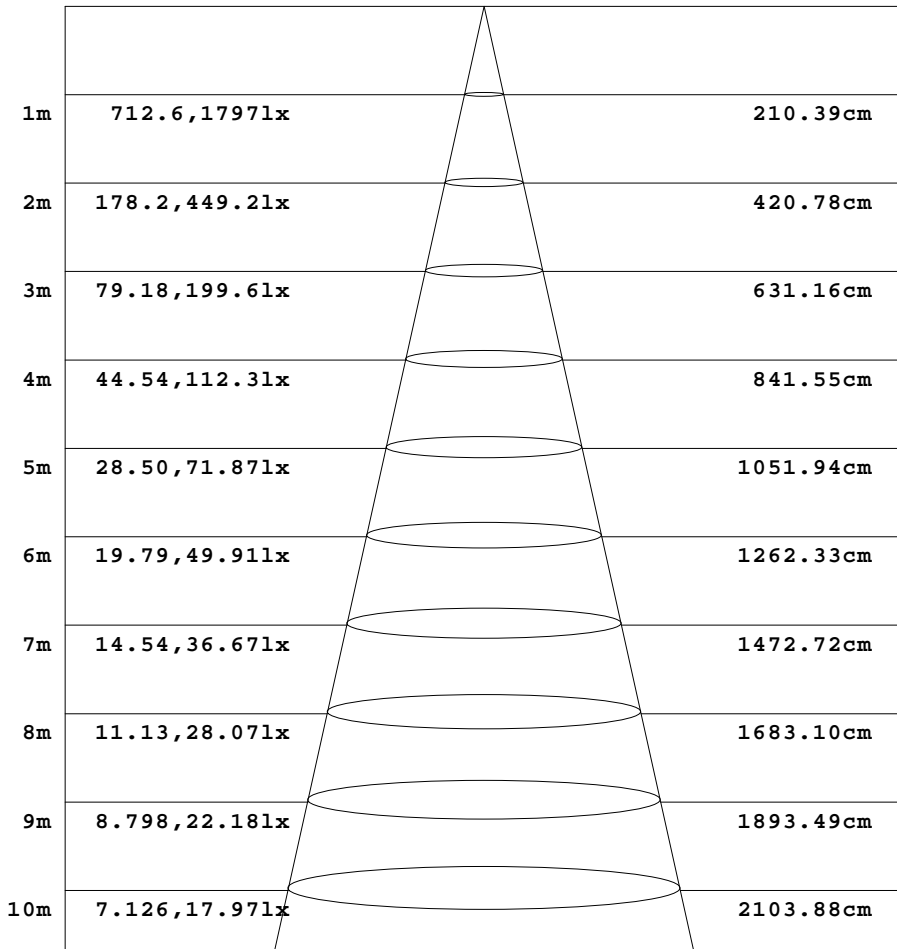

Height                      Eavg, Emax                      Angle:92.90deg                      Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-08

Angle Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM

Test:U:220.7V I:0.1808A P:39.18W PF:0.9823 Freq:49.99Hz Lamp Flux:4114.65x1 lm		
NAME: T-LINE 2"Diffuser	TYPE:	WEIGHT:
SPEC.:TL-LR5392FDFWS1200-T40NW8B-DC	DIM.: 4'x2"x3-3/5"	SERIAL No.:
MFR.: COLORS	SUR.:4'x2"	Shielding Angle:

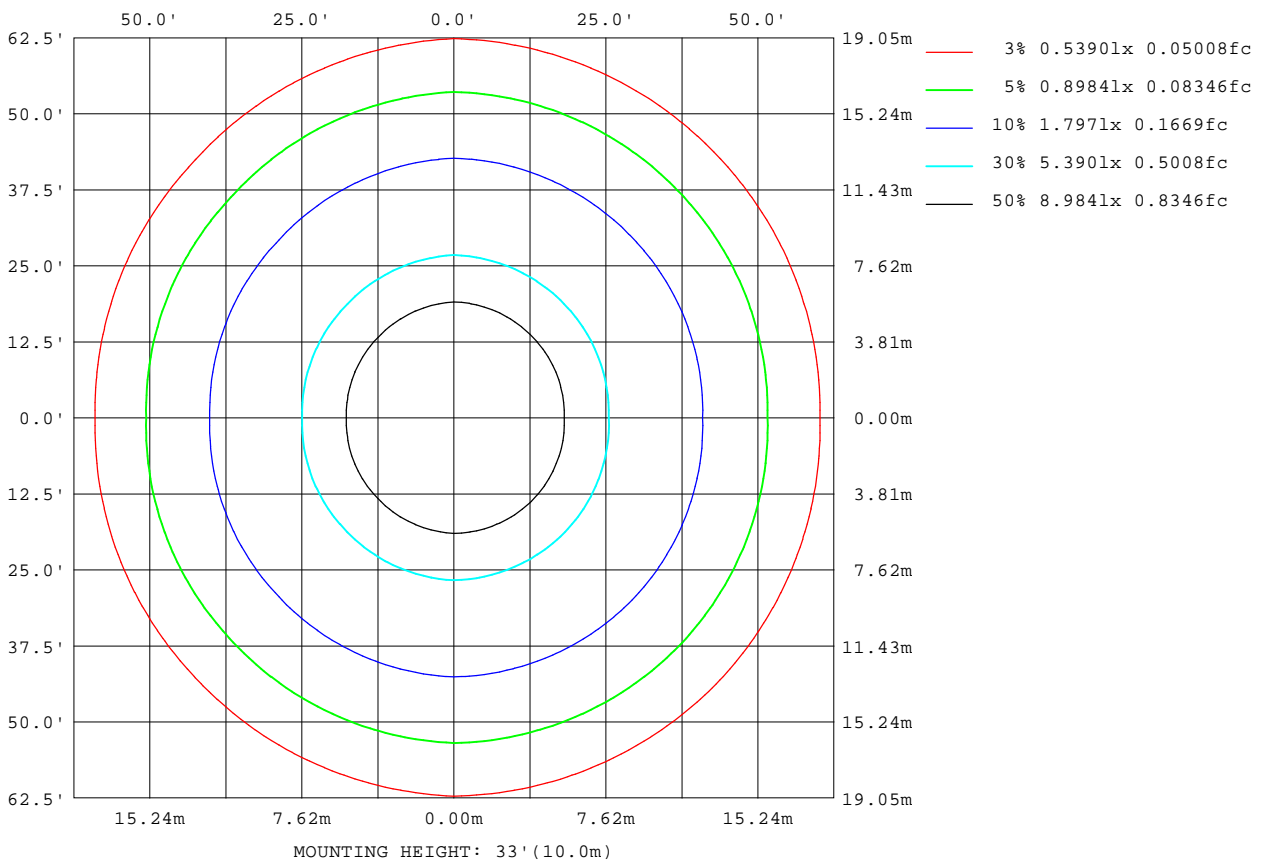

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-08

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

LED Avg.L Report

Test:U:220.7V I:0.1808A P:39.18W PF:0.9823 Freq:49.99Hz Lamp Flux:4114.65x1 lm		
NAME: T-LINE 2"Diffuser	TYPE:	WEIGHT:
SPEC.:TL-LR5392FDFWS1200-T40NW8B-DC	DIM.: 4'x2"x3-3/5"	SERIAL No.:
MFR.: COLORS	SUR.:4'x2"	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	14662
L_0~180(75)av	11557
L_0~180(85)av	6123
L_90~270(65)av	17165
L_90~270(75)av	13597
L_90~270(85)av	7436
L_45(65)av	15704
L_45(75)av	12400
L_45(85)av	6730

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

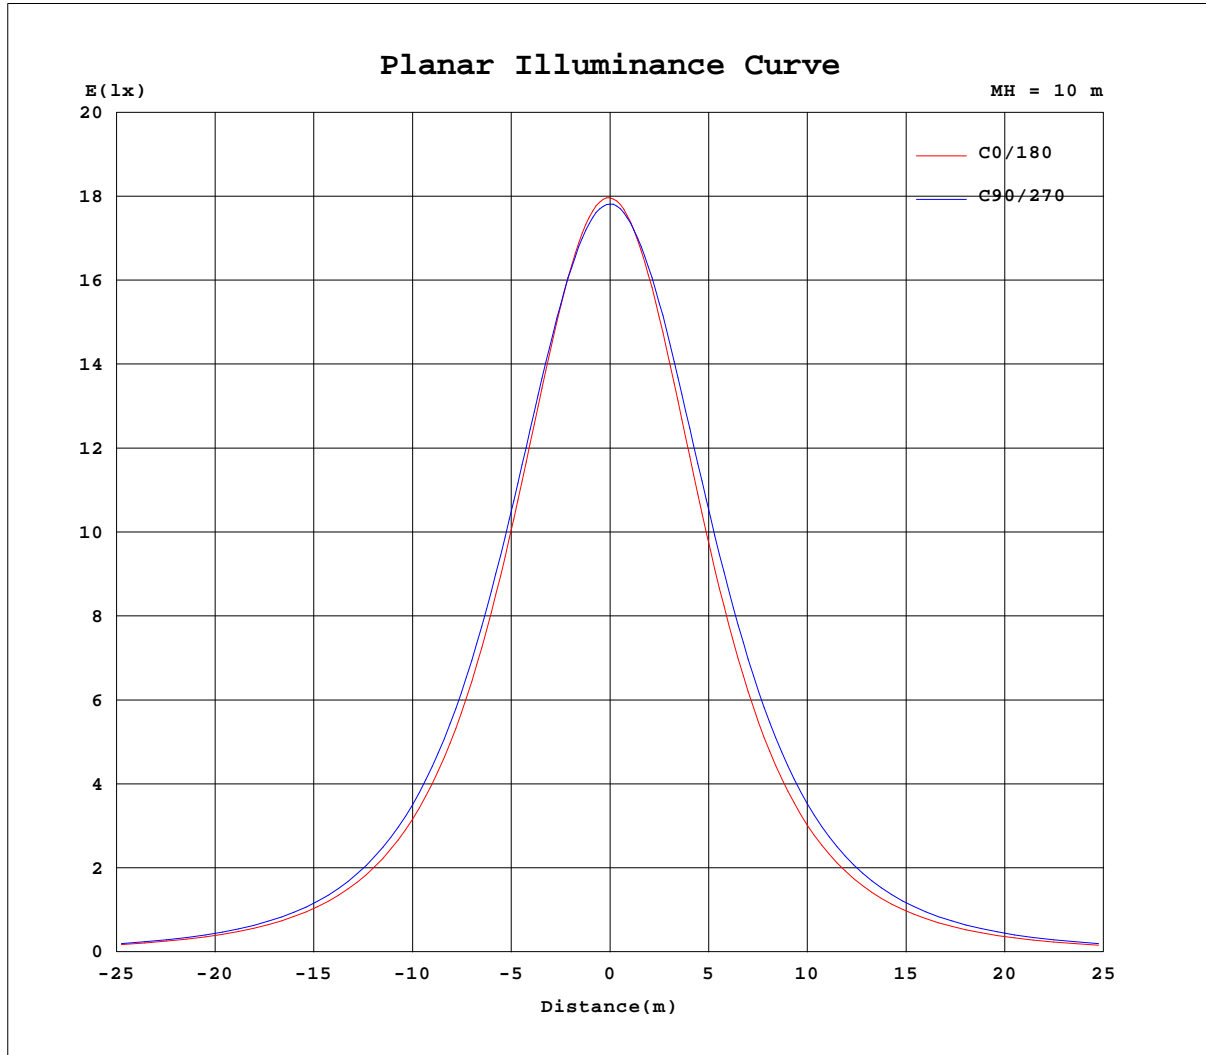

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: JYH  
 Test Date: 2020-04-08

Page Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity: 65.0%  
 Test Distance: 10.950m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.7V I:0.1808A P:39.18W PF:0.9823 Freq:49.99Hz Lamp Flux:4114.65x1 lm		
NAME: T-LINE 2"Diffuser	TYPE:	WEIGHT:
SPEC.:TL-LR5392FDFWS1200-T40NW8B-DC	DIM.: 4'x2"x3-3/5"	SERIAL No.:
MFR.: COLORS	SUR.:4'x2"	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	45	90	135	180	225	270	315											
0	1797	1789	1782	1780	1797	1789	1782	1780											
5	1786	1780	1770	1762	1775	1769	1770	1769											
10	1742	1744	1734	1717	1722	1722	1736	1731											
15	1667	1681	1677	1647	1638	1649	1683	1666											
20	1566	1594	1599	1554	1530	1556	1602	1581											
25	1446	1485	1501	1443	1405	1441	1508	1472											
30	1313	1363	1389	1318	1269	1314	1394	1349											
35	1173	1229	1265	1184	1129	1181	1270	1218											
40	1033	1092	1131	1047	990	1041	1137	1079											
45	896	953	993	910	855	904	999	941											
50	765	817	856	777	727	771	861	806											
55	641	686	719	649	605	643	725	677											
60	523	561	586	527	489	521	592	552											
65	412	442	459	409	376	404	464	433											
70	305	326	337	296	272	293	339	320											
75	205	220	223	192	175	190	225	215											
80	114	123	120	100	89.8	97.9	122	119											
85	42.0	46.4	40.5	30.7	25.8	28.8	41.9	43.3											
90	1.79	7.07	2.81	1.75	0.58	0.68	0.74	1.14											
95	1.39	1.96	2.53	1.94	1.17	1.20	1.18	1.03											
100	2.09	2.45	2.83	2.51	1.97	1.92	2.03	1.83											
105	3.03	3.28	3.83	3.26	2.92	2.75	3.36	2.74											
110	4.10	4.34	5.37	4.16	3.89	3.70	4.85	3.77											
115	5.24	5.51	7.20	5.14	4.91	4.66	6.26	4.90											
120	6.42	6.70	8.82	6.19	5.97	5.71	7.61	6.05											
125	7.68	7.90	10.1	7.33	7.11	6.90	8.91	7.14											
130	9.02	9.04	11.3	8.55	8.34	8.11	10.2	8.10											
135	10.5	10.2	12.3	10.1	9.61	9.55	11.4	9.30											
140	12.0	11.4	13.3	11.6	10.9	11.2	12.5	10.5											
145	13.6	12.5	14.3	13.0	12.3	12.9	13.7	11.8											
150	15.2	13.5	15.7	14.7	13.6	14.9	15.4	13.1											
155	17.0	14.7	17.5	16.7	15.2	17.0	17.2	14.5											
160	19.0	16.1	19.1	18.5	16.8	18.8	18.8	16.2											
165	20.6	18.1	20.7	20.2	18.4	20.5	20.4	18.4											
170	22.1	20.4	22.1	21.8	20.1	22.1	21.9	20.7											
175	22.9	22.6	23.4	23.7	20.9	23.9	23.4	23.0											
180	22.9	24.7	24.3	24.9	23.0	24.7	24.4	24.8											

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-04-08

g Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks: