


# Specification

Architecture lighting integration series

LS2126




# LS2126

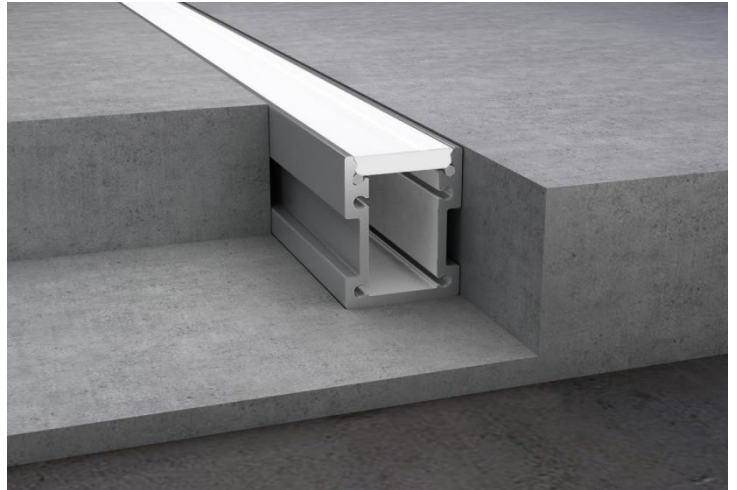




## Features



- Apply to outdoor ground , Can be used to outline and decorating
- AL6063-T5 aluminum profile with high-quality surface treatment.
- Close-fitting design without screw, make installation more convenient.



## Standard Configuration


Picture	Item	Parameter
	Profile	Profile weight : 1.16kg/2.5m Size : L2500*W21.4*H27mm Material : AL6063-T5 Surface processing : Anodizing
	cover	Type: Frosted diffuser Material : PC Light transmittance : 75% Size : L2500*W18*H3.4mm PC Feature : The diffuser will extend (shrink) 0.8mm/m when the temperature rises (drops) 10°C.
	End caps	Size : L27*W21.4*H5mm Material : PC

## Optional Accessories


Picture	Item	Parameter
	Flexible strip D8120-24V-8mm	Material :FPC,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ; CRI > 90/>95 ,Voltage :24V ;Power :13.5W/m ;Lumen :1320Lm/m ; Width : 8mm ; Minimum cutting unit : 6LEDs/50mm ;
	End caps with hole	Size : L27*W21.4*H5mm Material : PC

## Optical Parameter

(D8120-24V-8mm light source, frosted diffuser)

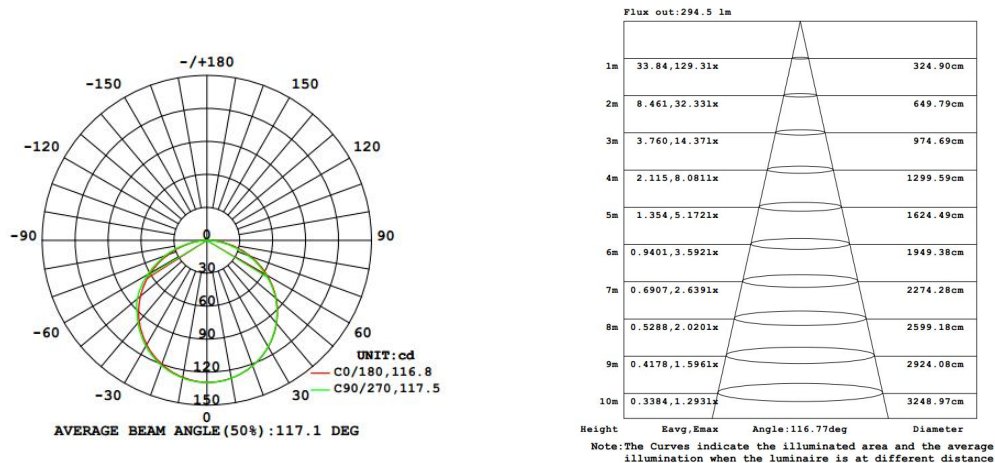

## Package

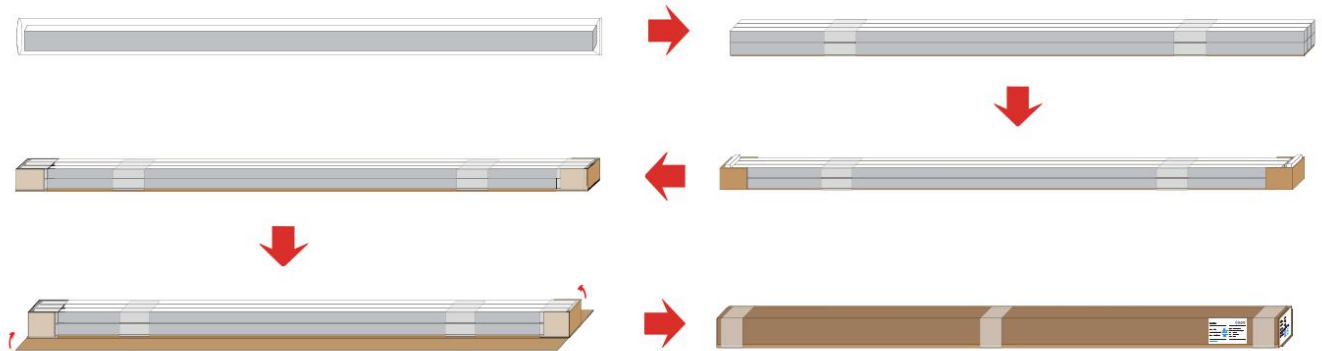

Item	Type	Size(mm)	NW(kg)	GW(kg)	Content
Profile and cover	Packing box	2580*173*140mm	27.2	30.2	20pcs/box

