
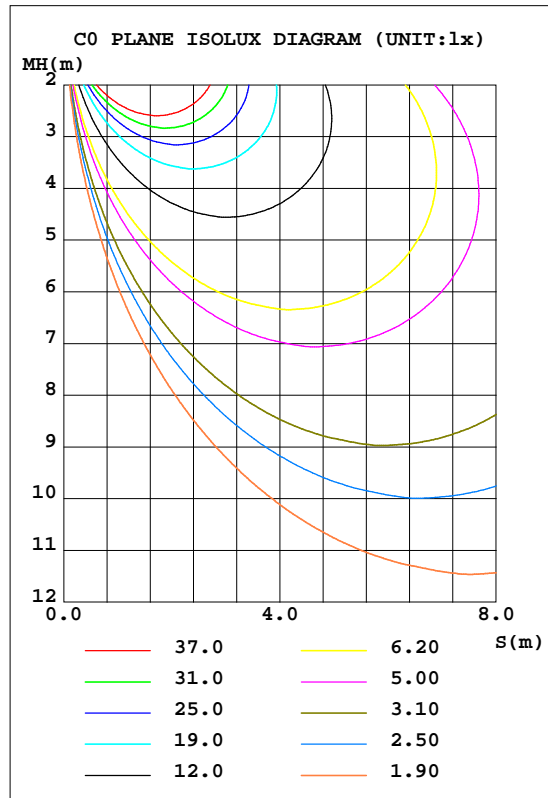


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.6V I:0.2414A P:51.59W PF:0.9688 Freq:49.99Hz Lamp Flux:4551.32x1 lm		
NAME: LLS-LC25FDXBS1200	TYPE:	WEIGHT:
SPEC.:LLS-LC25FDXBS1200-F20NW8N-DC	DIM.: 1200*25*100	SERIAL No.:01
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	LLS-LC25FDXBS1200	Imax(cd)	957.5	S/MH(C0/180)	19.25
NOMINAL POWER(W)	51.5	LOR(%)	100.0	S/MH(C90/270)	1.73
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	4551.3	h UP,DN(C0-180)	24.0,26.4
NOMINAL FLUX(lm)	4551.32	CIE CLASS	DIFFUSE	h UP,DN(C180-360)	24.3,25.3
LAMPS INSIDE	1	h up(%)	48.3	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	220	h down(%)	51.7	CIBSE SHR MAX	1.15

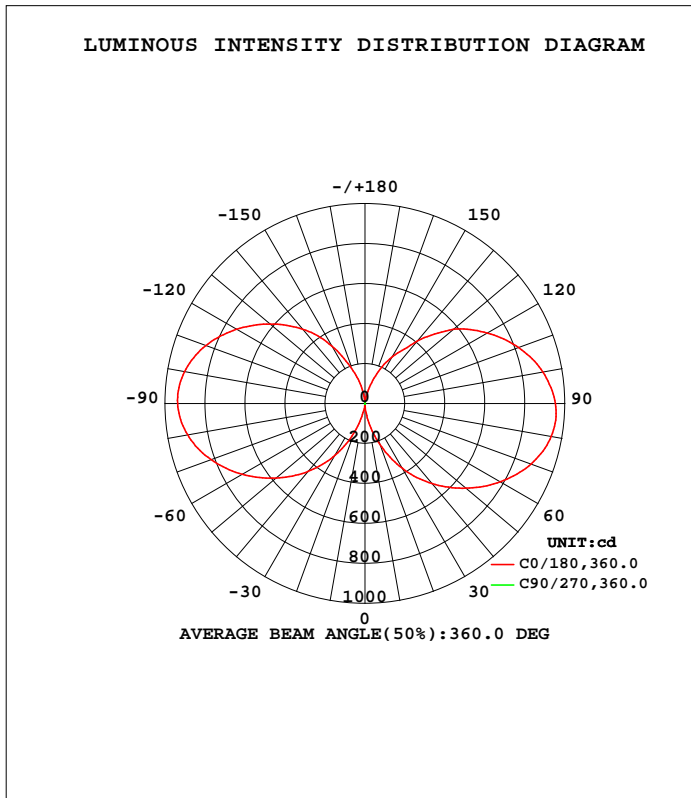

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-03-26

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	73.66	32.52	2.199	14.91	27.36	13.69	2.278	29.54	0- 10	1.124	1.124	0.02,0.02
20	217.1	117.5	2.264	84.46	148.1	84.27	2.405	111.9	10- 20	17.52	18.64	0.41,0.41
30	374.6	221.3	2.364	177.3	298.0	179.7	2.492	212.0	20- 30	65.70	84.34	1.85,1.85
40	523.4	325.5	2.451	276.4	444.2	279.8	2.545	313.7	30- 40	144.3	228.6	5.02,5.02
50	659.5	416.4	2.545	364.5	581.1	370.0	2.612	401.7	40- 50	241.8	470.5	10.3,10.3
60	783.6	490.7	2.624	439.0	708.8	449.5	2.749	476.8	50- 60	346.5	817.0	18,18
70	884.8	547.1	2.669	498.4	820.4	511.0	2.759	532.4	60- 70	445.4	1262	27.7,27.7
80	946.5	582.7	2.663	539.0	901.6	552.8	2.741	566.6	70- 80	524.0	1786	39.3,39.3
90	952.5	591.2	3.179	555.8	937.5	569.7	2.824	561.0	80- 90	567.0	2353	51.7,51.7
100	904.2	563.3	2.752	540.8	916.9	555.3	2.671	491.3	90-100	557.8	2911	64,64
110	818.8	505.8	2.111	502.1	847.5	516.4	2.090	470.0	100-110	505.3	3417	75.1,75.1
120	706.8	397.1	1.538	445.6	743.3	458.5	1.984	362.8	110-120	424.6	3841	84.4,84.4
130	578.0	279.2	1.470	371.6	619.3	385.8	1.857	272.1	120-130	316.4	4157	91.3,91.3
140	407.9	185.1	1.409	281.1	486.3	288.9	1.951	163.9	130-140	210.1	4368	96,96
150	267.8	107.6	1.834	172.0	332.4	180.9	2.083	98.74	140-150	117.3	4485	98.5,98.5
160	135.4	50.43	1.811	91.09	174.9	97.22	1.883	51.03	150-160	51.82	4537	99.7,99.7
170	24.80	7.746	1.570	21.78	58.05	24.70	1.596	10.25	160-170	13.78	4551	100,100
180	1.209	1.276	1.536	2.331	1.216	1.289	1.476	2.144	170-180	0.8180	4551	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-03-26

g Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.6V I:0.2414A P:51.59W PF:0.9688 Freq:49.99Hz Lamp Flux:4551.32x1 lm		
NAME: LLS-LC25FDXBS1200	TYPE:	WEIGHT:
SPEC.:LLS-LC25FDXBS1200-F20NW8N-DC	DIM.: 1200*25*100	SERIAL No.:01
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

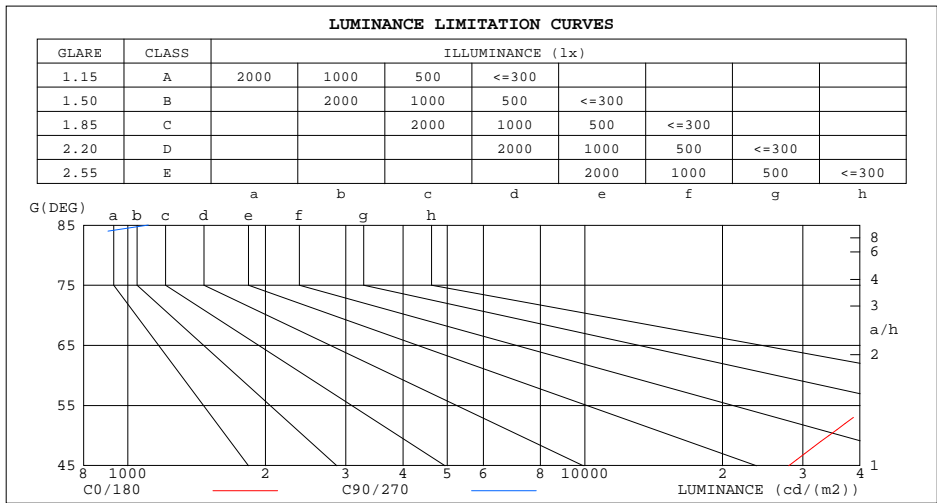

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	366104	1108
80	181692	511
75	118677	341
70	86233	260
65	66080	210
60	52238	175
55	42039	148
50	34202	132
45	27944	118


C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-03-26

G Range: 0 - 180DEG  
 G Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.6V I:0.2414A P:51.59W PF:0.9688 Freq:49.99Hz Lamp Flux:4551.32x1 lm		
NAME: LLS-LC25FDXBS1200	TYPE:	WEIGHT:
SPEC.:LLS-LC25FDXBS1200-F20NW8N-DC	DIM.: 1200*25*100	SERIAL No.:01
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.08	1.08	1.08	.99	.99	.99	.84	.84	.84	.70	.70	.70	.58	.58	.58	.52
1.0	.85	.78	.73	.78	.72	.67	.64	.60	.56	.52	.49	.46	.41	.38	.36	.30
2.0	.70	.62	.54	.64	.56	.50	.53	.47	.41	.42	.37	.33	.32	.29	.25	.20
3.0	.60	.50	.42	.54	.46	.39	.44	.38	.32	.35	.30	.25	.27	.22	.19	.14
4.0	.52	.42	.34	.47	.38	.31	.38	.31	.25	.30	.25	.20	.23	.18	.15	.11
5.0	.45	.35	.28	.41	.32	.25	.33	.26	.21	.26	.21	.16	.20	.15	.12	.08
6.0	.40	.30	.23	.36	.28	.21	.30	.23	.17	.23	.18	.13	.17	.13	.10	.06
7.0	.36	.26	.20	.32	.24	.18	.26	.20	.15	.21	.15	.11	.16	.11	.08	.05
8.0	.32	.23	.17	.29	.21	.15	.24	.17	.12	.19	.13	.10	.14	.10	.07	.04
9.0	.29	.20	.15	.26	.19	.13	.22	.15	.11	.17	.12	.08	.13	.09	.06	.03
10.0	.26	.18	.13	.24	.17	.12	.20	.14	.09	.16	.11	.07	.12	.08	.05	.03

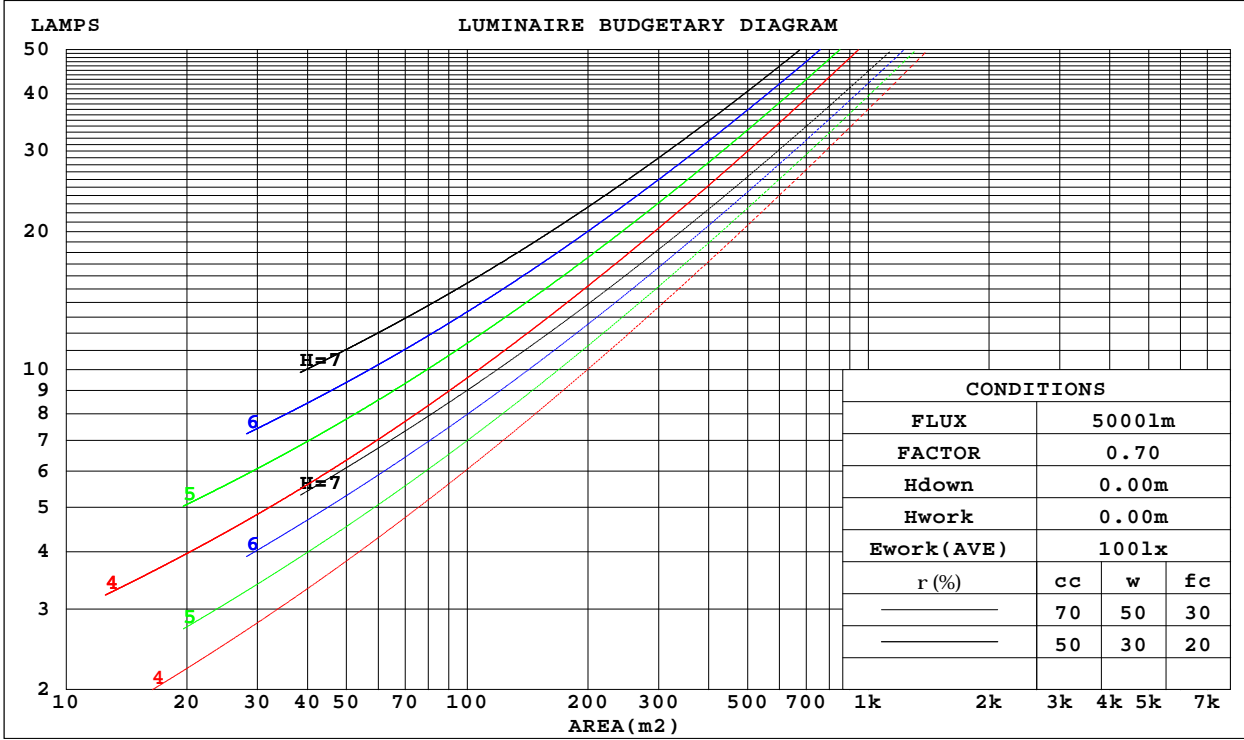

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-03-26

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:220.6V I:0.2414A P:51.59W PF:0.9688 Freq:49.99Hz Lamp Flux:4551.32x1 lm		
NAME: LLS-LC25FDXBS1200	TYPE:	WEIGHT:
SPEC.:LLS-LC25FDXBS1200-F20NW8N-DC	DIM.: 1200*25*100	SERIAL No.:01
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.457	.260	.082	.435	.248	.079	.393	.226	.072	.355	.205	.066	.320	.186	.060	
2.0	.373	.204	.063	.352	.194	.060	.315	.175	.054	.280	.157	.049	.248	.140	.044	
3.0	.320	.171	.051	.302	.162	.049	.267	.145	.044	.235	.129	.040	.206	.114	.035	
4.0	.282	.147	.043	.265	.139	.041	.234	.124	.037	.204	.110	.033	.177	.096	.029	
5.0	.253	.129	.037	.237	.122	.035	.208	.108	.032	.181	.096	.028	.156	.083	.025	
6.0	.229	.115	.033	.215	.108	.031	.188	.096	.028	.163	.085	.025	.139	.073	.022	
7.0	.209	.103	.029	.196	.098	.028	.171	.087	.025	.148	.076	.022	.126	.066	.019	
8.0	.193	.094	.026	.181	.089	.025	.157	.079	.022	.136	.069	.020	.115	.059	.017	
9.0	.179	.086	.024	.167	.082	.023	.146	.072	.020	.126	.063	.018	.106	.054	.016	
10.0	.166	.080	.022	.156	.075	.021	.136	.066	.019	.117	.058	.016	.099	.050	.014	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.558	.558	.558	.477	.477	.477	.326	.326	.326	.187	.187	.187	.060	.060	.060	
1.0	.561	.526	.494	.480	.451	.425	.329	.310	.294	.189	.180	.171	.061	.058	.055	
2.0	.556	.505	.462	.477	.435	.399	.327	.301	.278	.188	.175	.163	.060	.057	.053	
3.0	.550	.490	.443	.471	.423	.384	.324	.294	.269	.187	.172	.159	.060	.056	.052	
4.0	.542	.479	.430	.465	.414	.374	.320	.288	.263	.185	.169	.156	.060	.055	.051	
5.0	.534	.470	.422	.459	.407	.367	.316	.284	.259	.183	.167	.154	.059	.054	.051	
6.0	.527	.463	.417	.453	.401	.363	.313	.280	.257	.181	.165	.153	.059	.054	.050	
7.0	.520	.457	.412	.447	.396	.359	.309	.277	.255	.180	.163	.152	.058	.054	.050	
8.0	.513	.451	.409	.442	.392	.357	.306	.275	.253	.178	.162	.151	.058	.053	.050	
9.0	.507	.447	.407	.437	.388	.355	.302	.273	.252	.176	.161	.150	.057	.053	.050	
10.0	.501	.443	.405	.432	.385	.353	.300	.271	.251	.175	.160	.150	.057	.053	.050	

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-03-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.6V I:0.2414A P:51.59W PF:0.9688 Freq:49.99Hz Lamp Flux:4551.32x1 lm										
NAME: LLS-LC25FDXBS1200					TYPE:			WEIGHT:		
SPEC.:LLS-LC25FDXBS1200-F20NW8N-DC					DIM.: 1200*25*100			SERIAL No.:01		
MFR.: COLORS					SUR.:1200*25			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.9	20.1	19.8	21.0	22.1	11.4	12.5	12.2	13.4	14.6
3H	23.1	24.1	23.9	25.0	26.2	13.2	14.2	14.1	15.2	16.3
4H	25.3	26.3	26.2	27.2	28.4	14.0	15.0	14.9	15.9	17.1
6H	27.7	28.7	28.6	29.6	30.8	14.7	15.6	15.6	16.5	17.8
8H	29.1	30.0	30.0	30.9	32.1	14.9	15.8	15.8	16.8	18.0
12H	30.5	31.4	31.5	32.4	33.6	15.1	16.0	16.0	16.9	18.2
4H 2H	19.4	20.5	20.3	21.4	22.6	15.4	16.4	16.3	17.4	18.6
3H	23.7	24.6	24.7	25.6	26.8	17.6	18.5	18.6	19.5	20.7
4H	26.2	27.0	27.1	27.9	29.2	18.7	19.5	19.7	20.5	21.7
6H	28.8	29.5	29.8	30.5	31.8	19.7	20.4	20.6	21.4	22.6
8H	30.3	30.9	31.2	31.9	33.2	20.0	20.7	21.0	21.7	23.0
12H	31.9	32.5	32.8	33.5	34.8	20.3	21.0	21.3	21.9	23.2
8H 4H	26.5	27.2	27.4	28.2	29.4	21.6	22.3	22.6	23.3	24.6
6H	29.4	30.0	30.4	31.0	32.3	23.1	23.7	24.1	24.7	26.0
8H	31.1	31.6	32.1	32.6	33.9	23.8	24.4	24.8	25.4	26.7
12H	33.0	33.4	34.0	34.4	35.8	24.4	24.9	25.4	25.9	27.3
12H 4H	26.5	27.1	27.5	28.1	29.4	22.5	23.2	23.5	24.2	25.5
6H	29.5	30.1	30.5	31.1	32.4	24.4	24.9	25.4	26.0	27.3
8H	31.3	31.8	32.3	32.8	34.1	25.4	25.9	26.4	26.9	28.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
2.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.3				

CIE Pub.117, 4551 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 5.3)

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-03-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.6V I:0.2414A P:51.59W PF:0.9688 Freq:49.99Hz Lamp Flux:4551.32x1 lm		
NAME: LLS-LC25FDXBS1200	TYPE:	WEIGHT:
SPEC.:LLS-LC25FDXBS1200-F20NW8N-DC	DIM.: 1200*25*100	SERIAL No.:01
MFR.: COLORS	SUR.:1200*25	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	33	20	12	31	19	12	28	17	11	3
0.80	41	27	18	39	25	17	34	22	15	6
1.00	48	33	23	45	31	22	39	30	20	8
1.25	55	40	30	51	37	28	44	33	25	11
1.50	61	45	35	56	43	33	48	37	29	14
2.00	69	54	44	63	51	41	54	44	36	18
2.50	74	61	51	68	57	47	58	48	41	21
3.00	78	66	56	72	61	53	61	52	45	24
4.00	84	73	64	77	68	60	65	58	52	28
5.00	88	78	70	81	72	65	68	62	56	31
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-03-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.6V I:0.2414A P:51.59W PF:0.9688 Freq:49.99Hz Lamp Flux:4551.32x1 lm		
NAME: LLS-LC25FDXBS1200	TYPE:	WEIGHT:
SPEC.:LLS-LC25FDXBS1200-F20NW8N-DC	DIM.: 1200*25*100	SERIAL No.:01
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

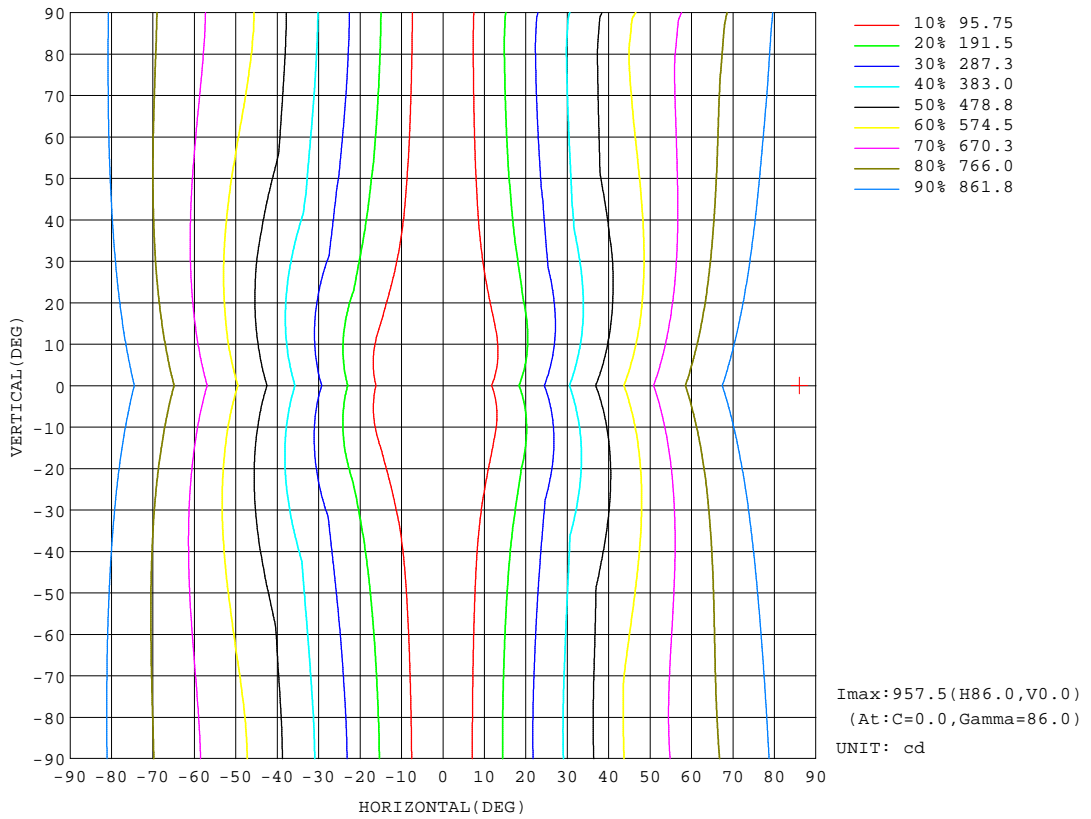

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-03-26


Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:



AAI Figure

Test:U:220.6V I:0.2414A P:51.59W PF:0.9688 Freq:49.99Hz Lamp Flux:4551.32x1 lm		
NAME: LLS-LC25FDXBS1200	TYPE:	WEIGHT:
SPEC.:LLS-LC25FDXBS1200-F20NW8N-DC	DIM.: 1200*25*100	SERIAL No.:01
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

Flux out:336.7 lm

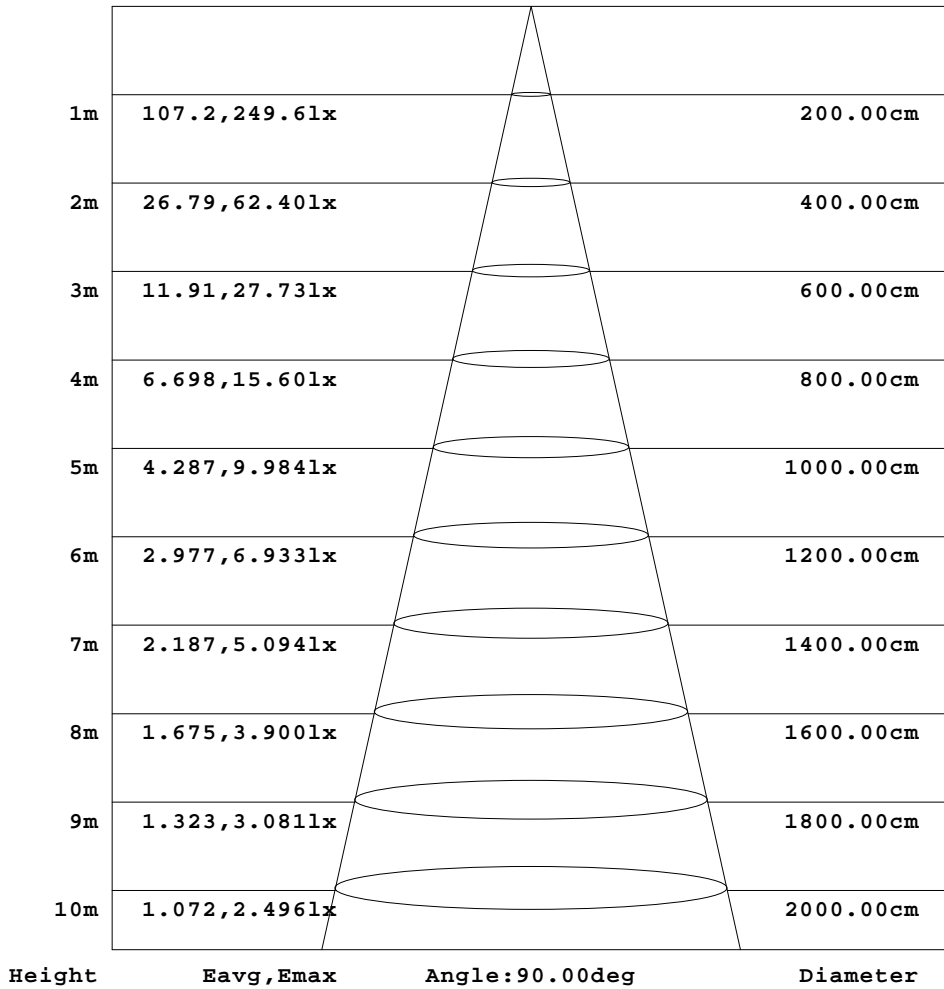


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-03-26

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM


Test:U:220.6V I:0.2414A P:51.59W PF:0.9688 Freq:49.99Hz Lamp Flux:4551.32x1 lm		
NAME: LLS-LC25FDXBS1200	TYPE:	WEIGHT:
SPEC.:LLS-LC25FDXBS1200-F20NW8N-DC	DIM.: 1200*25*100	SERIAL No.:01
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

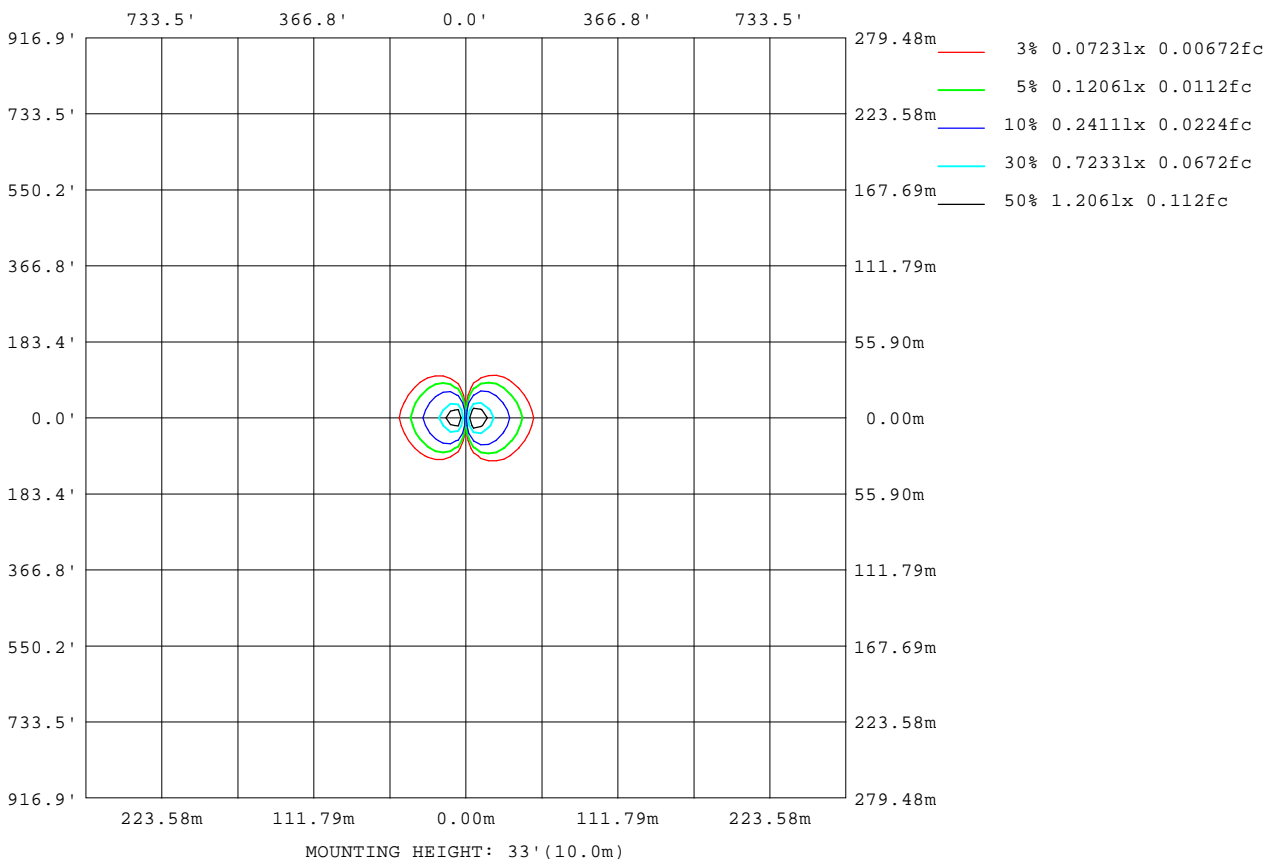

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-03-26

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

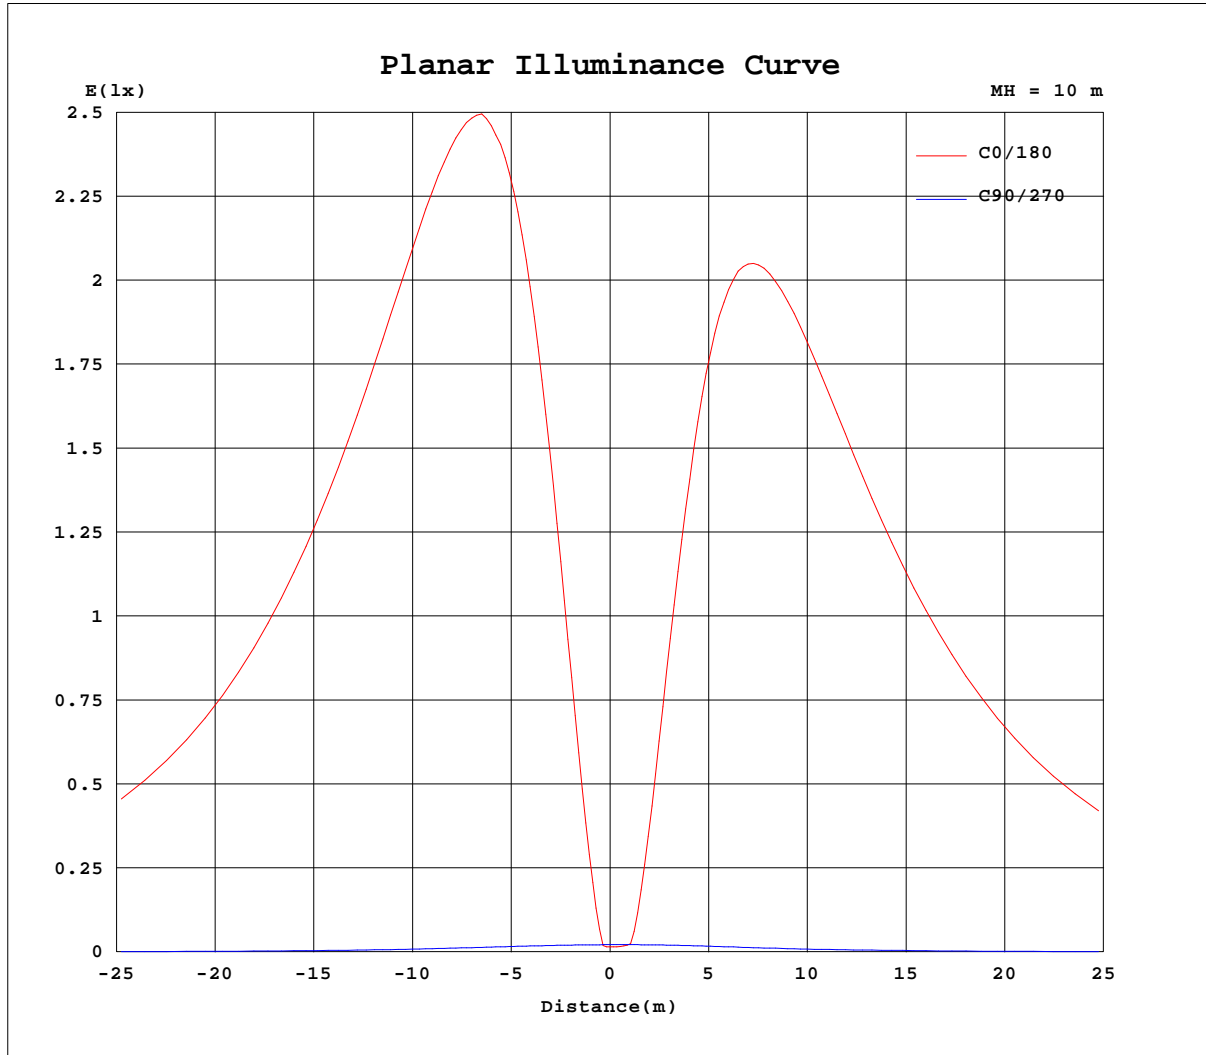

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: JYH  
 Test Date: 2020-03-26

Page Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity: 65.0%  
 Test Distance: 10.950m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.6V I:0.2414A P:51.59W PF:0.9688 Freq:49.99Hz Lamp Flux:4551.32x1 lm		
NAME: LLS-LC25FDXBS1200	TYPE:	WEIGHT:
SPEC.:LLS-LC25FDXBS1200-F20NW8N-DC	DIM.: 1200*25*100	SERIAL No.:01
MFR.: COLORS	SUR.:1200*25	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	45	90	135	180	225	270	315										
0	1.55	2.72	2.20	3.22	1.55	2.72	2.20	3.22										
5	21.0	6.02	2.19	3.11	2.06	3.13	2.24	4.83										
10	73.7	32.5	2.20	14.9	27.4	13.7	2.28	29.5										
15	142	71.5	2.22	44.8	81.0	43.8	2.35	66.8										
20	217	118	2.26	84.5	148	84.3	2.40	112										
25	296	168	2.33	130	222	131	2.44	161										
30	375	221	2.36	177	298	180	2.49	212										
35	452	274	2.42	228	373	230	2.51	263										
40	523	325	2.45	276	444	280	2.54	314										
45	593	373	2.50	322	514	327	2.56	359										
50	660	416	2.54	365	581	370	2.61	402										
55	723	456	2.56	403	646	413	2.70	442										
60	784	491	2.62	439	709	449	2.75	477										
65	838	521	2.66	471	767	482	2.75	507										
70	885	547	2.67	498	820	511	2.76	532										
75	921	568	2.65	521	866	535	2.76	552										
80	947	583	2.66	539	902	553	2.74	567										
85	957	591	2.90	551	926	565	2.70	572										
90	953	591	3.18	556	938	570	2.82	561										
95	934	581	2.91	552	934	566	2.73	526										
100	904	563	2.75	541	917	555	2.67	491										
105	866	539	2.45	524	888	539	2.35	463										
110	819	506	2.11	502	847	516	2.09	470										
115	765	463	1.56	476	799	490	1.86	440										
120	707	397	1.54	446	743	459	1.98	363										
125	645	338	1.53	412	683	424	1.94	312										
130	578	279	1.47	372	619	386	1.86	272										
135	492	222	1.41	329	554	344	1.87	216										
140	408	185	1.41	281	486	289	1.95	164										
145	325	145	1.46	224	415	230	2.03	132										
150	268	108	1.83	172	332	181	2.08	98.7										
155	203	75.9	1.89	131	247	138	2.03	74.7										
160	135	50.4	1.81	91.1	175	97.2	1.88	51.0										
165	74.1	26.7	1.64	52.7	115	57.5	1.72	29.1										
170	24.8	7.75	1.57	21.8	58.0	24.7	1.60	10.2										
175	1.85	1.46	1.55	3.69	14.0	2.74	1.50	2.30										
180	1.21	1.28	1.54	2.33	1.22	1.29	1.48	2.14										

C Range: 0 - 360DEG  
 C Interval: 45.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:JYH  
 Test Date:2020-03-26

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:10.950m [K=1.0000]  
 Remarks: